

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDER**

Sealed items rate tender on form No. 6 and 8 are hereby invited on behalf of Governor of HP for the following works from approved and eligible contractor enlisted in HPPWD, so as to reach in this office on 11.10.2021 up to 11.30 AM and shall be opened on the same day at 12.00 Noon in the presence of intending contractors or their authorized representative who may like to be present. The tender form can be had from this office against cash payment (non refundable) up to 10.30 AM on 11.10.2021.

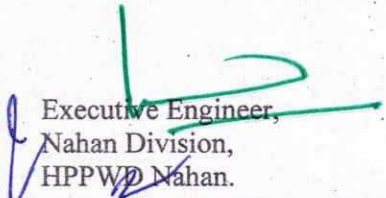
The earnest money in the shape of FDR/TDR in HP duly pledged in favour of Executive Engineer Nahan Division HP.PWD Nahan must be accompanied with the each tender. Conditional tender and tender received without earnest money will be rejected. The undersigned reserves the right to reject any or all tenders without assigning the reason. The offer of the tender will be kept opened for 75 days.

Sr. No.	Name of works	Estimated Cost	Earnest Money	Time Limit	Cost of Form
1	Repair and maintenance of various bridges under Nahan Sub Division Sainwala Section.(SH:-Painting, finishes & other repair works etc.)	4,96,794/-	10,000/-	02 Month	350/-
2	Supplying & stacking machine made bricks under stock storage.	2,22,000/-	4,500/-	01 Month	350/-
3	A/R & M/O residence of the S.E. & E.E. HPPWD Nahan.(SH:-Providing distempering, painting other Misc. repair works).	2,81,150/-	5,700/-	02 Month	350/-
4	A/R & M/O rest house at Nahan.(SH:-R/O flooring, plastering, distempering, painting & other Misc. repair works)	4,99,731/-	10,000/-	02 Month	350/-

CERTIFICATE:- It is certified that the tenders of above work are exigency/emergent nature and in public interest.

Terms & Conditions:-


1. The Contractors/Bidders must submit their Permanent Income Tax Account Number/ GST number on the tender alongwith copy of the same be attached with the application.
2. The Contractors/Firms should attach copy of the Registration/Renewal with the application.
3. The contractor/bidders should quote his rates Both in Figures and words, where there is any discrepancy between the rates in figures and words, the rates in words will be governed.
4. The contractors/bidders must inspect the site to ascertain/familiar the site conditions, accessibility etc. before quoting the bid/tender.
5. Conditional and telegraphic tender shall not be accepted and rejected straightway. Tender received after due date and time will be rejected.
6. The contractor/firms should have to produce the details of works in hand in HP. PWD, and its position thereof alongwith application.
7. The tender documents shall be issued to only those contractors who does not have more than two works in hand in any HP PWD Circle/ Division worth Rs. 1.00 Crore each.
8. The Contractor shall have to establish testing laboratory at site for the day to day testing of material.
9. The offer shall remain valid upto 75 days.
10. The provisions of guidelines issued vide the Principal Secretary (PW) to the Govt. of HP, Shimla vide notification No.PBW(B)A(3)1/2020 dated.Shimla-2 the 22nd July, 2020 regarding adoption of CPWD works manual 2019 & other publication of CPWD in HPPWD shall also be applicable.
11. The Executive Engineer reserve the right to reject any or all the tenders without assigning any reason.


Executive Engineer,
Nahan Division,
HPPWD Nahan.

For & on behalf of Governor of Himachal Pradesh.

Copy forwarded to the following for information & further necessary action:-

1. The Engineer-in-Chief, HP.PWD., Shimla please.
2. The Chief Engineer(SZ), HP.PWD., Shimla-2 please.
3. The Deputy Commissioner, Sirmaur Distt. at Nahan please.
4. The Superintending Engineer, 12th Circle, HP.PWD., Nahan please.
5. The Executive Engineer (IT Cell), Nigam Vihar, HPPWD., Shimla-2 for uploading of Notice Inviting Tenders on departmental website please.
6. The S.D.M. Nahan please.
7. The Distt. Panchayat Officer, Nahan please.
8. The Executive Officer, M.C., Nahan please..
9. All the Assistant Engineers under this division to display on their respective Notice Boards.
10. The Notice Board.

 Executive Engineer,
Nahan Division,
HPPWD Nahan.

SCHEDULE OF QUANTITY

Name of work:-Repair & maintenance of variour bridges under Nahan sub-division,Sainwala section (SH :-Painting, finishes & other repair works etc.)

Estimated cost :- Rs.4,96,794 /-only

Earnest Money:- Rs.10,000/-only

Time:- Two Months.

Sr. No	Description/ Item Rate	Quantity	unit	Rate		Amount
				Figure	Words	
1	Providing and applying Birla white wall care putty and painting two coats of water based cement paint on undecorated surface after cleaning/removing of dirt, dust, oil, grease, efflorescence and applying paint @ of one litre for two sqm including all leads,lifts and carriage of materials complete as per entire satisfaction of the Engineer in charge.	1606.74	Per square metre			
2	Patching of damaged concrete surface with polymer concrete and curing compounds, initiator and promoter, available in present formulations, to be applied as per instructions of manufacturer and as approved by the Engineer including all leads,lifts and carriage of materials complete as per entire satisfaction of the Engineer in charge.	137.88	Per square metre			
3	Plain cement concrete 1:3:6 (one cement is to three sand is to six graded stone aggregate) nominal mix in foundation with crushed stone aggregate forty mm nominal size mechanically mixed, placed in foundation and compacted by vibration including curing for fourteen days including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	28.00	Per Cubic metre			
4	Plain/Reinforced Cement Concrete grade M-25 (one cement is to one point five sand is to three graded stone aggregate) as per drawing and Technical Specifications. including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	3.05	Per Cubic metre			
5	Repair of steel railing to bring it to original shape cleaning and repainting as per drawing and technical specification including all leads, lifts and carriage of materials complete as per entire satisfaction of the Engineer in charge.	15.00	Per running metre			
	Total :-					

Executive Engineer,
HP.PWD., Division
Nahan.

SCHEDULE OF QUANTITY

Name of work:-Supplying and stacking machine made bricks under stock & storage

Estimated cost :- Rs.2,22,000 /-only

Earnest Money:- Rs.4,500/-only

Time:- One month

Sr. No	Description/ Item Rate	Quantity	unit	Rate		Amount
				Figure	Words	
1	Supplying and stacking machine made bricks of standard size of best quality including all leads,lifts and carriage of materials complete as per entire satisfaction of the Engineer in charge.	6000.00	Each			
	Total :-					

Executive Engineer,
HP.PWD., Division
Nahan.

3

SCHEDULE OF QUANTITY

Name of work:- A/R & M/O Residence of the Superintending Engineer & Executive Engineer, HPPWD Nahan (SH:- Providing distempering,painting other miscellaneous repair works)


Estimated cost :- Rs.2,81,150/-only

Earnest Money:- Rs.5,700/-only

Time:- Two Months.

Sr.N o	Description/ Item Rate	Quantity	unit	Rate		Amount
				Figure	Words	
1	Removing dry or oil bound distemper by washing and scraping and sand papering the wall surface smooth including necessary repairs to scratches complete including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	1860.00	Per Square metre			
2	Applying Birla white wall care putty over plaster surface after thoroughly brushing the surface free from mortar drops, dust, loose materials and other foreign matters sand papered smooth to give final matter finish to the surface complete including all leads, lifts and carriage of materials and other incidental charges complete as per entire satisfaction of the Engineer-in-charge.	930.00	Per square metre			
3	Applying priming with cement primer coat on new concrete/Masonry/ asbestors cement/plastered surface and including preparing the surface by thoroughly cleaning oil,grease,dirt and other foreign matter and sand papering as required with : Ready Mixed primer including carriage of materials with in all leads and other incidental complete as per entire satisfaction of the Engineer-in-Charge.	930.00	Per square metre			
4	Wall painting (two coats) with acrylic emulsion paint of approved brand and manufacture for interior grade on undecorated concrete/stone/plastered wall surfaces to give an even shade including t thoroughly brushing the surface free from mortar dropping and other foreign matter and sand papered smooth including applying of putty a required for metling the surface including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	800.34	Per square metre			
5	Distempering (two coats) with oil bound washable distemper of approved brand and manufacture and of required shade on undecorated wall surfaces to give an even shade over and including a priming coat with distemper primer of approved brand and manufacture after thoroughly brushing the surface free from mortar droppings and other foreign matter and also including preparing the surface even and sand papered smooth. Priming coat with distemper primer including all leads, lifts and carriage of materials and other incidental charges complete as per entire satisfaction of the Engineer-in-charge including carriage of materials with in all leads and other incidental complete as per entire satisfaction of the Engineer-in-Charge.	224.79	Per square metre			
6	Finishing wall with weather proof exterior grade emulsion of approved design (apex ultima) or its equarlied on undecorated wall surface (two coats) to give an even shade and final finish after thoroughly cleaning the surface to remove all dir, dust and other foreign matter etc including sand paper smooth complete including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	1157.00	Per Square metre			

7	Painting two coats (excluding priming coat) on steel and other metal surface under coat with ready mixed paint, brushing to give an even shade including cleaning of all dirt, dust and other foreign matter sand papering and stopping. Ready mixed paint other than white including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	104.00	Per Square metre			
8	Painting two coats (excluding priming coat) on wood and wood based surfaces, with ready mixed paint, brushing to give an even shade including cleaning of all dirt, dust and other foreign matter sand papering and stopping. Ready mixed paint other than white including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	206.82	Per Square metre			
Total :-						


 Executive Engineer,
 Nahan (B&R) Division,
 HP, PWD, Nahan.

SCHEDULE OF QUANTITY

Name of work:- A/R & M/O Rest House at Nahan (SH:-Repair of flooring,plastering,distemping, painting & other miscellaneous repair works)

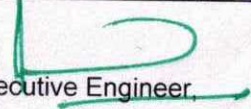
Estimated cost :- Rs :- 4,99,731/-only
Earnest Money:- Rs. 10,000/-only
Time:- Two Months.

Sr.No	Description/ Item Rate	Quantity	unit	Rate		Amount
				Figure	Words	
1	Removing dry or oil bound distemper by washing and scraping and sand papering the wall surface smooth including necessary repairs to scratches complete including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	1778.65	Per Square metre			
2	Applying Birla white wall care putty over plaster surface after thoroughly brushing the surface free from mortar drops, dust, loose materials and other foreign matters sand papered smooth to give final matter finish to the surface complete including all leads, lifts and carriage of materials and other incidental charges complete as per entire satisfaction of the Engineer-in-charge.	656.55	Per square metre			
3	Applying priming with cement primer coat on new concrete/Masonry/ asbestors cement/plastered surface and including preparing the surface by thoroughly cleaning oil,grease,dirt and other foreign matter and sand papering as required with : Ready Mixed primer including carriage of materials with in all leads and other incidental complete as per entire satisfaction of the Engineer-in-Charge.	656.55	Per square metre			
4	Distemping (two coats) with oil bound washable distemper of approved brand and manufacture and of required shade on undecorated wall surfaces to give an even shade over and including a priming coat with distemper primer of approved brand and manufacture after thoroughly brushing the surface free from mortar droppings and other foreign matter and also including preparing the surface even and sand papered smooth. Priming coat with distemper primer including all leads, lifts and carriage of materials and other incidental charges complete as per entire satisfaction of the Engineer-in-charge including carriage of materials with in all leads and other incidental complete as per entire satisfaction of the Engineer-in-Charge.	1257.12	Per square metre			
5	Painting two coats (excluding priming coat)on new wood and wood based surfaces,with ready mixed paint,brushing to give an even shade including cleaning of all dirt,dust and other foreign matter sand papering and stopping.Ready mixed paint other then white including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	286.20	Per Square metre			
6	Painting two coats (excluding priming coat)on on new steel and other metal surface under coat with ready mixed paint,brushing to give an even shade including cleaning of all dirt,dust and other foreign matter sand papering and stopping.Readymixed paint other then white including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	110.52	Per Square metre			
7	Finishing wall with weather proof exterior grade emulsion of approved design (apex ultima) or its equarlied on undecorated wall surface (two coats) to give an even shade and final finish after throughly cleaning the surface to remove all dir, dust and other foreign matter etc including sand paper smooth complete including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	599.00	Per Square metre			

8	Demolition above G.L. upto floor two level including disposal of unserviceable material within all lead lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	6.45	Per Cubic metre			
9	Providing and fixing 10mm thick anti skid water proof stain and impact resistant heavy duty vetrified tiles Nitco or equivalent 600x600mmx10mm manufactured of approved shade and colour in flooring, treads of steps and landings laid over 12mm thick cement mortar 1:3 (One cement is to three sand) jointed with cement slurry mixed with pigment to match the shade of tiles as required complete. including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	9.00	Per square metre			
10	Providing and laying Duro stone vetrified tiles (300x300mmx8mm) in grey/ coloured of required shade in skirting risers of steps and dados on 12mm thick cement mortar 1:3 (one cement is to three sand) laid over and jointed with neat cement slurry finished with flush pointing in white cement mixed with pigment of required shade to match the shade of tiles complete including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	15.00	Per square metre			
11	White glazed tiles 6 mm thick in skirting risers of steps and dado 12 mm thick cement mortar 1:3 (one cement is to three sand) and jointed with cement slurry including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	22.00	Per Square metre			
12	Providing and applying of sealing materiala Asian paint or equivalent damp proofroof treatment leak proof agent including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	45.00	Per Square metre			
13	Repairs to plaster in patches of 2.50 Sqm and under and 10 to 15mm thick including cutting the patch in proper shape and replastering the surface of the wall including disposal of rubbish to the dumping ground in Cement Mortar 1:5 (One cementt is to five sand) including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	57.00	Per Square metre			
14	Dismantling doors, windows and clerestory windows, ventilators etc. (wood or steel) shutters including chowkhats, architraves, hold fasts and other attachements etc. complete and stacking including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	6.00	Each			
15	Providing wood work in frame of doors, windows, clearstory windows and other frames wrought framed and fixed in positions sal wood including carriage of materials with in all leads, lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	0.300	Per Cubic metre			
16	Providing and fixing panelled glazed of panelled and glazed shutters for doors windows and clerestory windows including black enamelled iron butt hinges with necessary screws complete 40mm(forty milimetre)thick 2nd class deodar wood Upto Floor to all level including all leads, lifts and carriage of materials completeas per entire satisfaction of the Engineer.	9.76	Per Square metre			

17	Providing and fixing 2nd class deodar wood 40mm (forty milimetres) thick wire gauge shutters using galvanised M.S. wire gauge of I.S. gauge designation 85 (eighty five grame) G. with wire of dia 0.56 (zero point fifty six metres)) m for doors windows including bright finished black enamelled iron hinges with necessary screws including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	14.79	Per Square metre			
18	Providing and fixing anodized aluminium sliding door bolts anodised transparent or died to required shade and colour with bolts,nuts and screws etc. complete including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.(a) 300 X16 mm(Three hundred into Sixteen milimeter)	4.00	Each			
19	Providing and fixing aluminium Tower bolts (barrel type) anodized transparent or dyed to required Shade & colour with screws etc. complete including all leads,lifts and carriage of materials and other incidental charges complete as per entire satisfaction of the Engineer-in-charge. 250x10mm.	20.00	Each			
20	Providing & fixing aluminium handles with the necessary screws etc. complete 125mm (One hundred twenty five milimetre) size as per HPPWD specification 1990 volume-I (One) including carriage of all labour equipments & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of the Engineer-in-Charge.rge.	8.00	Each			
21	Providing and fixing 100mm bright finished brass floor door stopper with rubber cushion screws etc. to suit shutter thickness complete including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge.	2.00	Each			
22	Providing and fixing bright finished hydraulic door closer. complete including carriage of materials with in all leads,lifts and other incidentals complete as per entire satisfaction of the Engineer-in-charge..	4.00	Each			
23	Providing and fixing vitreous china wash basin with single hole for pillar tap with C.I. or M.S brackets painted white including cutting holes & making good the same but excluding fittings 630mm x 450mm (six hundred thirty into four hundred fifty milimetre) including all leads,lifts and carriage of materials and other incidental charges complete as per entire satisfaction of the Engineer-in-charge.	5.00	Each			
24	Providing & fixing C.P. brass pillar tap with capstan head 15mm dia (fifteen milimeter) dia as per HP.PWD.,specification Volume-I (one) including carriage of all labour equipment & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of the Engineer-in-charge.	5.00	Each			
25	Providing & fixing brass bib tap (superior or heavy type) 15mm dia (fifteen milimetre) dia as per HP.PWD.,specification Volume-I (one) including carriage of all labour equipment & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of the Engineer-in-charge.	10.00	Each			

26	Providing & fixing Vitreous China wash down water closet (European type W.C. pan) with intergal " P " or " S " trap including jointing the trap with soil pipe in cement mortar 1 : 1 (One cement : one sand) (Seat & cover to be measured & paid for separately as per HP.PWD., specification Volume -I (one)including carriage of all labour equipment & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of Engineer-in-Charge.	1.00	Each			
27	Providing & fixing one piece Vitreous China wash down water closet European type soft close seat cover & twin flush fitting 660x365x765 mm including carriage of all labour equipment & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of Engineer-in-Charge.	2.00	Each			
28	Providing & fixing 10 ltr. (Ten litre) net capacity first quality white shade low level flushing cistern (with dual flushing cistern) item No. 502 ISI marked No.7231 of prayag sanitary Hardware or its equivalent with a pair of C.I. or mild steel brackets complete with fitting such as lead valveness syphon 15mm(fifteen milimeter) nominal size PVC brass valve with polythene float,with push button,couplings for connections with inlet,outlet & over flow pipes, 40mm (forty milimeter) dia C.P. flush bend including cutting holes in walls & making good the same & connecting the flush bend with cistern and closet (Overflow pipe to be measured & paid for separately)as per HP.PWD., specification Volume-I (one)including carriage of all labour equipment & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of the Engineer-in-Charge.	1.00	Each			
29	Providing & fixing plastic seat (solid/Hollow type) & cover for wash down water closet with C.P. brass hinges & rubber buffers Solid Type white plastic seat & cover as per HP.PWD., specification Volume-I (one)including carriage of all labour equipment & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of the Engineer-in-Charge.	1.00	Each			
30	Providing and fixing lead connection pipe with brass unions including all leads and lifts as per the direction of Engineer-in-charge. 15 mm dia.30/45 cm length.	10.00	Each			
31	Providing and fixing to wall ceiling and floor galvanised mild steel tubes (Medium grade) tube fitting and clamps including making good the wall, ceiling & floor .15 mm (Fifteen milimetre) nominal bore as per HP.PWD., Specification volume-I (one)including carriage of all labour equipment & materials to various location through all leads,lifts & other incidental charges complete as per entire satisfaction of the Engineer-in-Charge.	10.00	Per running metre			
Total :-						


 Executive Engineer,
 Nahan (B&R) Division,
 HP,PWD, Nahan.