



**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT**

Telephone No: 01907-256827

E-mail: ee-seraj-hp@gov.in

No. PW-SRJ-CB-TA/2025-26-

4702

Dated:- 05/09/2025

To

*The Executive Engineer (I.T.) Cell,
HPPWD, Nirman Bhawan, Nigam Vihar,
Shimla-2.*

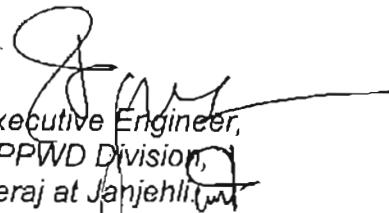
Subject: -

*Regarding publication of the tender on
departmental site.*

*Enclosed please find herewith the copies of notice
inviting tender for the up-loading on department web-site before 15.09.2025
as per notification issued by the Pr. Sec. (PW) to the Govt. of HP vide letter
No. PBW(B) A(3)1/2024 dated 03.01.2024*

*Certified that the works mentioned in the tender
notice are urgent in nature and in co-ordination with the disaster
management Act 2005.*

DA: - As Above.


Executive Engineer,
HPPWD Division,
Seraj at Janjehli.

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT**

Telephone No: 01907-256827
E-mail: ee-seraj-hp@gov.in

NOTICE INVITING TENDER

Sealed percentage rate short terms tender(s) on PWD form No. 6 & 8 are hereby invited by the Executive Engineer, HP.PWD Division, Seraj at Janjehli Distt. Mandi (HP) on behalf of the Governor of H.P. for the following works from registered contractors in HP.PWD (B&R) in appropriate class, so as to reach in this office on 17.09.2025 upto 10.30 A.M. and will be opened on the same day at 11.00 A.M. in the presence of contractors or their authorised representative who wish to be present at that time. The application for obtaining the tender form will be received on 15.09.2025 between 10.00 A.M. to 01:00 P.M. The tender form can be had from this office against cash payment (Non-refundable) on 15.09.2025 between 11.00 AM to 05.00 PM.

The earnest money in the shape of National Saving Certificate/Time Deposit Account/ Saving Account of the Post office in Himachal Pradesh duly pledged in favour of the Executive Engineer, HP.PWD Division, Seraj at Janjehli Distt. Mandi H.P. must accompany with the tender form. Ambiguous/ Telegraphically/conditional tenders or tender by FAX shall not be entertained/considered in any case. The tenders without earnest money shall summarily be rejected. The offer of the tender shall be kept open for 90 days. The Executive Engineer, HP.PWD Division, Seraj at Janjehli reserve the right to reject/accept any offer of tender without assigning any reasons.

Sr. No.	Name of work	Estimated Cost	Earnest Money	Cost of Tender	Time allowed
1	SDF/2025/186,R/O Repair of Restoration and Rain Damages on Shilibagi to Deol Jainshala road KM 0/000 to 10/000. (SH:- Removal of slips in and land slide in various RDs 0/000 to 1/500)	87,898	2000	350	Two Months
2	SDF/2025/184,R/O Repair of Restoration and Rain Damages on Lambathach Shilibagi Kalhani kashod Pandli Bakhali Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips in and land slide in various RDs 16/070 to 16/880)	87,936	2000	350	Two Months
3	SDF/2025/110,R/O Repair of Restoration and Rain Damages on Mandi Gagal Chail Janjehli road KM 0/000 to 82/000 (SH:- Removal of slips and land slide in various Rds in KM 73/500 to 74/435) MDR 24 .	88,660	2000	350	Two Months
4	SDF/2025/196 RR Damages on Road to Jughand road in km 0/00 to 6/500. (SH:- Removal of slips & land slides in km 2/00 to 3/500).	87,648	2000	350	Two Months
5	SDF/2025/185,R/O Repair of Restoration and Rain Damages on Lambathach Shilibagi Kalhani kashod Pandli Bakhali Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips in and land slide in various RDs 20/125 to 20/930)	88,047	2000	350	Two Months
6	SDF/2025/159 RR Damages on Mandi Gagal Chail Janjehli Chhatri road in km 0/00 to 82/00. (SH:- Removal of slips & land slides in km 72/500 to 73/500).	87,961	2000	350	Two Months
7	SDF/2025/166 RR Damages on Lambathach Chiuni Chet Shetadhar road in km 0/00 to 25/00. (SH:- Removal of slips & land slides in km 4/635 to 5/500).	87,713	2000	350	Two Months
8	RR Damaged on Link road from Jarol to Dhanyar KM 0/000 to 3/000 (SH:- Removal of slips and land slide in various Rds in KM 0/000 to 2/000) .	99,934	2000	350	Two Months
9	SDF/2025/165,R/O Repair of Restoration and Rain Damages on Lambathach Shilibagi Kalhani kashod Pandli Bakhali Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips and land slide in various Rds in KM 4/390 to 5/180) MDR 24 .	88,940	2000	350	Two Months

10	SDF/2025/173,R/0 Repair of Restoration and Rain Damages on Mandi Gagal Chail Janjehli road KM 0/000 to 82/000 (SH:- Removal of slips and land slide in various Rds in KM 63/000 to 64/000) MDR 24.	88,566	2000	350	Two Months
11	RR Damages on Jarol to Jughand road KM 0/000 to 6/5000 (SH:- Removal of slips and land slide in various Rds in KM 4/400 to 6/500).	98,720	2000	350	Two Months
12	SDF/2025/182,R/0 Repair of Restoration and Rain Damages on Lambathach Shillibagi Kalhani kashod Pandli Bakhali Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips and land slide in various Rds in KM 5/180 to 6/000)	88,473	2000	350	Two Months
13	SDF/2025/109 RR Damages on Janjehli Chhatri Magrugalla road in km 0/00 to 11/00. (SH:- Removal of slips & land slides in km 3/015 to 4/324).	72,893	2000	350	Two Months
14	SDF/2024/832, Repair and Maintenance of Cholthach to Khanokhali Helipad 0/000 to 1/500 (SH:- Construction of unlined surface drains In KM 0/200 to 0/900 and Removal of slips in various RDs)	99,767	2000	350	Two Months
15	SDF/2025/108 RR Damages on Lambathach Shillibagi kalhani road in km 0/00 to 36/00. (SH:- Removal of slips & land slides in various Rd's 9/185 to 9/975).	87,800	2000	350	Two Months
16	SDF/2025/192 RR Damages on Chail Janjehli to Bakhaliwar road in km 0/00 to 5/00. (SH:- Removal of slips & land slides in km 0/00 to 3/00).	87,504	2000	350	Two Months
17	SDF/2025/183 RR Damages on Lambathach Shillibagi kalhanl road in km 0/00 to 36/00. (SH:- Removal of slips & land sldes in various Rd's 10/000 to 10/775).	87,905	2000	350	Two Months
18	SDF/2025/195 RR Damages on Road to Jughand road in km 0/00 to 6/500. (SH:- Removal of slips & land slides in km 0/00 to 1/500).	87,726	2000	350	Two Months
19	RR Damages on Jarol to Jughand road KM 0/000 to 6/5000 (SH:- Construction of embankment and earth filling in KM 4/210 to 4/255)	99,323	2000	350	Two Months
20	SDF/2025/181 RR Damages on Rilla - Chandi - Kurshali road in km 0/00 to 8/400 (SH:- Removal of slips & land slides in various Rd's 0/00 to 1/500).	88,804	2000	350	Two Months
21	SDF/2025/107 RR Damages on Thunag Kelti Jainshla road in km 0/00 to 9/00. (SH:- Removal of slips & land slides in various Rd's 0/00 to 1/500).	87,848	2000	350	Two Months
22	RR Damaged on Ghumrala to Jugandh road KM 0/000 to 3/000 (SH:- Removal of slips and land slide in various Rds in KM 0/000 to 1/500) .	99,053	2000	350	Two Months
23	RR Damages on Chail Janjehli to Bakhaliwar road in km 0/000 to 5/000. (SH:- Removal of slips & land slides in km 3/000 to 4/700).	99,048	2000	350	Two Months
24	RR Damages on Jarol to Jughand road KM 0/000 to 6/5000 (SH:- Construction of embankment and earth filling In KM 4/255 to 4/300)	95,912	2000	350	Two Months
25	RR Damages on Thunag Banyad Mandehalu road KM 0/000 to 14/200 (SH:- Removal of slips & land sldes in km 0/000 to 2/000).	98,021	2000	350	Two Months
26	RR Damages on Chail Janjehli to Tungadhar road 0/000 to 2/000 (SH:- Construction of embankment and earth filling in KM 1/420 to 1/540)	99,950	2000	350	Two Months
27	RR Damages on Thachadhar Naloti Balwar Kilan Dawada road KM 0/000 to 8/000(SH:- Removal of slips & land slides in KM 0/000 to 0/700)	98,729	2000	350	Two Months
28	RR Damages on Kadoun Helipad to Banadhar road KM 0/000 to 4/700 (SH:- Removal of slips & land slides in KM 1/000 to 1/400)	84,091	2000	350	Two Months

29	RR Damages on Thunag Lambsafar road KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/180 to 5/255).	99,854	2000	350	Two Months
30	RR Damages on Thunag Kelli Jaishla road KM 0/000 to 9/000 (SH:- Removal of slips & land slides in km 5/500 to 6/885).	98,408	2000	350	Two Months
31	RR Damages on Thachadhar Naloti Balwar Kilan Dawada road KM 0/000 to 8/000 (SH:- Removal of slips & land slides in KM 0/700 to 1/300)	98,168	2000	350	Two Months
32	RR Damages on Bhatakidhar to Khablech road in KM 0/000 to 6/000 (SH:- Removal of slips & land slides in km 0/000 to 0/700).	98,409	2000	350	Two Months
33	RR Damages on Thunag Lambsafar road KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/675 to 5/735).	98,965	2000	350	Two Months
34	RR Damages on Thunag Kelli Jaishla road KM 0/000 to 9/000 (SH:- Removal of slips & land slides in KM 6/885 to 7/400)	98,798	2000	350	Two Months
35	RR Damages on Kadoun Helipad to Banadhar road KM 0/000 to 4/700 (SH:- Removal of slips & land slides in KM 1/400 to 1/800)	95,114	2000	350	Two Months
36	RR Damages on Thunag Banyad Mandehalu road KM 0/000 to 14/200 (SH:- Removal of slips & land slides in km 2/800 to 4/000).	99,448	2000	350	Two Months
37	RR Damages on Thunag Lambsafar road KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/330 to 5/435).	97,306	2000	350	Two Months
38	RR Damages on Chail Janjehli to Tungadhar road 0/000 to 2/000 (SH:- Construction of embankment and earth filling in KM 1/540 to 1/645)	99,895	2000	350	Two Months
39	RR Damages on Chedakhad to Bajehal Spehnidhar road KM 0/000 to 8/000 (SH:- Removal of slips & land slides in km 0/000 to 2/000).	99,399	2000	350	Two Months
40	RR Damages on Thunag Lambsafar road KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/510 to 5/585).	98,981	2000	350	Two Months
41	BSP/2024/779, Repair of road Bhatkidhar Khablech road KM 0/000 to 6/500 (SH:- Providing and Laying Stone Soling in various RDs in KM 0/360 to 0/740)	99,968	2000	350	Two Months
42	RR Damages on Mandi Gagal Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall In wire crate at Rds 81/540 to 81/545).	99,919	2000	350	Two Months
43	RR Damages on Shivakhad Jhamach Spehnidhar road in km 0/00 to 8/00. (SH:- Removal of slips & land slides in km 4/00 to 6/00).	99,738	2000	350	Two Months
44	RR Damages on Thunag Lambsafar road KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/585 to 5/675).	97,966	2000	350	Two Months
45	RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & land slides in km 1/765 to 2/300).	98,178	2000	350	Two Months
46	RR Damages on Mandi Gagal Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall In wire crate at Rds 81/535 to 81/540).	99,859	2000	350	Two Months
47	BSP/2024/778, Repair of road Jaudahr Shnwatatch to Bungadhar road KM 0/000 to 1/000 (SH:- Providing and Laying Stone Soling In various RDs in KM 0/015 to 0/250)	99,717	2000	350	Two Months
48	RR Damages on Ghumrala Chakudhar via Bharad HB Gushana road in km 0/00 to 4/500. (SH:- Removal of slips & land slides in km 0/00 to 3/00).	98,188	2000	350	Two Months

49	RR Damages on Shivakhad Jhamach Spehnidhar road in km 0/00 to 8/00. (SH:- Removal of slips & land slides in km 6/00 to 8/00).	98,683	2000	350	Two Months
50	RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & land slides in km 0/750 to 1/765).	99,849	2000	350	Two Months
51	RR Damages on Rilla- Chandi- Kurshali road in km 0/00 to 8/400. (SH:- Removal of slips & land slides in km 5/00 to 6/00).	98,789	2000	350	Two Months
52	RR Damages on Mandi Gagal Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall in wire crate at Rds 81/520 to 81/526.20).	98,900	2000	350	Two Months
53	RR Damages on Link road from Chaluthach Rohara to Tarali in GP Dheem Kataru km 0/00 to 3/00. (SH:- Removal of slips & land slides at various Rds in km 0/00 to 2/500).	98,475	2000	350	Two Months
54	RR Damages on Ripalptal Siyandhar road in km 0/00 to 2/500. (SH:- Removal of slips & land slides in km 0/350 to 0/700).	99,906	2000	350	Two Months
55	RR Damages on Mandi Gagal Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall in wire crate at Rds 81/526.20 to 81/532.20).	99,017	2000	350	Two Months
56	RR Damages on Rilla- Chandi- Kurshali road In km 0/00 to 8/400. (SH:- Removal of slips & land slides in km 3/00 to 5/00).	99,663	2000	350	Two Months
57	RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & land slides in km 0/300 to 0/750).	99,581	2000	350	Two Months
58	RR Damages on Sendha to Narthi road in km 0/00 to 2/500. (SH:- Removal of slips & land slides in km 0/00 to 2/500).	98,495	2000	350	Two Months
59	RR Damages on Biyond to Tharheni road G.P. Janjehli in km 0/00 to 1/500. (SH:- Removal of slips,debris & land slides in various Rds).	98,361	2000	350	Two Months
60	RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & land slides in km 0/00 to 0/300).	98,851	2000	350	Two Months
61	RR Damages on Janjehli Rigarh Shikarimta road in km 0/00 to 14/400. (SH:- Removal of debris from berm, removal of slips/ land sildes In various Rds in km 3/00 to 7/300).	98,035	2000	350	Two Months
62	RR Damages on Raingalu to Nagakeoli road in km 0/00 to 4/00. (SH:- Removal of slips & land sildes in km 1/00 to 2/900).	99,222	2000	350	Two Months
63	RR Damages on Ripalptal Siyandhar road in km 0/00 to 2/500. (SH:- Removal of slips & land sildes in km 0/00 to 0/350).	99,323	2000	350	Two Months
64	RR Damages on Thunag Banyad Mandehalu road In Km. 0/000 to 14/200 (SH:- Removal of slips and land slides in Km. 11/500 to 13/000).	98,021	2000	350	Two Months
65	RR Damaged on various roads under Jnajehli Sub-Division. (SH:- Hiring of Tractor for carriage of Muck/debris in various roads under Janjehli Section-II) Job No.)	98,800	2000	350	Two Months
66	RR Damaged on various roads under Jnajehli Sub-Division. (SH:- Hiring of Tipper for carriage of different material in varlous roads under Bagachanogi Section) Job No.I	99,200	2000	350	Two Months
67	RR Damaged on various roads under Jnajehli Sub-Division. (SH:- Hlring of Tipper for carriage of different material in various roads under Janjehll Section-II) Job No.II	99,200	2000	350	Two Months

68	RR Damaged on various roads under Janjehli Sub-Division. (SH:- Hiring of Tipper for carriage of different material in various roads under Janjehli Section-I) Job No.1	96,000	2000	350	Two Months
69	Preparation of 4Nos roads/Sites PPR of Landslide and flood Mitigation Under SDMF. (SH :- Preparation of PRELIMINARY PROJECT REPORT, Landslide Mitigation Measures Near Lambathach Govt Degree College on Mandi Gagal Chail Janjehli road (MDR -24) RD 73/120 to 73/270, Landslide Mitigation Measures Near Government Pharmacy College administrative block, staff residence and Girls Hostel Block, Landslide Mitigation Measures Kelodhar to Patikari Road km 10/150 to 10/450 and Landslide Mitigation Measures Near Dezi Village on Thunag Punjot Lambashafer Road km 4/450 to 4/650)	80000	2000	350	One Month
70	Preparation of 4Nos roads/Sites PPR of Landslide and flood Mitigation Under SDMF. (SH :- Preparation of PRELIMINARY PROJECT REPORT, Landslide Mitigation Measures Near Auhun Village on Mandi Gagal Chail Janjehli road (MDR -24) km 61/470 to 61/510, Landslide Mitigation Measures Near Dogra Village Lehthach Panchayat Thachadhar to Naloti road km 1/500 to 1/580, Landslide Mitigation Measures Near Dharwarthach Village Panchayat Shilibagi Lambathach Shilibagi Kalhani road KM 12/930 to 13/010 and Landslide Mitigation Measures on Mandi-Gagal-Chail-Janjehli-Ranabag Road Portion At KM 55/585 to 55/670, KM 58/940 to 59/010 under NLRMP).	80000	2000	350	One Month

Terms and conditions:-

1. The contractors/firms are required to quote their rates clearly percentage rate, failing which the tender is liable to be rejected.
2. The contractors/firms are required to quote their rates clearly both in words as well as in figures, failing which the tender is liable to be rejected.
3. The contractor will produce show their enlistment/renewal documents at the time of obtaining tender.
4. Latest Income tax and GST tax clearance certificates as well as PAN Number and GST number must be attached with the application failing which tender documents will not be issued.
5. The tender forms will be issued to only those contractors who have not more than two works in hand in any of HP.PWD. Circles.
6. The tender forms will not be issued to those contractors whose performance is not found satisfactory.
7. As per Govt. Notification No. PW/CTR/32-20-General Isnt. CPWD/2020-37996-38095 dated 13.03.2023 the tender above 5% will be summarily rejected and tenders amount below 30% of amount put to tender will also be accepted.

No. PW-SRJ/NIT/2025-26- 4694-4701

1. Copy to the Director, Information and publication Department HP Shimla for favour of publication in one regional newspaper and one National newspaper.
2. Copy to the superintending Engineer 1st Circle HPPWD mandi for information please
3. Copy to Sub-Divisional office (Civil) Thunag Tehsil Thunag for information please.
4. Copy to Block Development office Janjehli Tehsil Thunag Distt. Mandi HP.
5. Copy to Assistant Engineer Janjehli Sub-Division under this Division.
6. Copy to Drawing Branch & Account Branch
7. Notice board of this office.

Executive Engineer,
HPPWD Division,
Seraj at Janjehli
Dated:- 05/09/2025

Executive Engineer,
HPPWD Division,
Seraj at Janjehli

BILL OF QUANTITY

Estimate Cost: 87,898.00 Only
 Earnest Money: 2,000.00 Only

Time : Two months

Name of Work :- SDF/2025/186,R/0 Repair of Restoration and Rain Damages on Shilbagi to Deol Jainshala road KM 0/000 to 10/000. (SH:- Removal of slips in and land slide in various RDs 0/000 to 1/500)

Sr. No.	Description of work	Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs.P	Total amount with all taxes including GST in words
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within any lift and lead upto any lead as per technical specification 302.3.5 and 1611 as per direction of Engineer in charge within all leads lifts and carriage of materials and other incidentals.	744.27	Per Cubic Meter	118.10	87,898.00	Rupees Eighty Seven Thousand Eight Hundred Ninety Eight Only
				Total:-	87,898.00	
	Quated Rate in figure					
	Quated Rate in words					

[Signature]
 Executive Engineer
 HPPWD Division
 Serajat Janah


BILL OF QUANTITY

Estimate Cost: 87,936.00 Only
 Earnest Money: 2,000.00 Only

Time : Two months

Name of Work :- SDF/2025/184,R/0 Repair of Restoration and Rain Damages on Lambatbach Shilhibagi Kalhani kashod Pandi Bakhali Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips in and land slide in varios RDs 16/070 to 16/880)

Sr. No.	Description of work	Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto any/lead as per technical specification 302.3.5 and 1611 as per direction of Engineer in charge with in all leads lifts and carriage of materials and other Incidental.	744.59	Per Cubic Meter	118.10	87,936.00	Rupees Eighty Seven Thousand Nine Hundred Thirty Six Only
				Total:-	87,936.00	
	Quated Rate in figure					
	Quated Rate in words					


 Executive Engineer
 HPPWD Division
 Serai at Jajjeh

(2)


BILL OF QUANTITY

Estimate Cost: 88,660.00 Only
 Earnest Money: 2,000.00 Only

Time: Two months

Name of Work :- SDF/2025/110,R/0 Repair of Restoration and Rain Damages on Mandi Gagal Chail Jazjehli road KM 0/000 to 82/000 (SH:- Removal of slips and land slide in various Rds in KM 73/500 to 74/435) MDR 24.

Sr. No.	Description of work	Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto any lead as per technical specification 302.3.5 and 161.1 as per direction of Engineer in charge with in all leads lifts and carriage of materials and other incidentals.	750.72	Per Cubic Meter	118.10	88,660.00	Rupees Eighty Eight Thousand Six Hundred Sixty Only
				Total:-	88,660.00	
	Quated Rate in figure					
	Quated Rate in words					


 Executive Engineer
 HPPWD Division
 Seraj at Jani

६


BILL OF QUANTITY

Estimate Cost: Rs 87,648.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/196 RR Damages on Road to Jughand road in km 0/00 to 6/500. (SH:- Removal of slips & land slides in km 2/00 to 3/500).

S.No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	742.15	per Cubic metre	118.10	87,648.00	Rupees Eighty Seven Thousand Six Hundred Forty Eight Only
	Total				87,648.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPWD Janjgur


BILL OF QUANTITY

Estimate Cost: 88,047.00 Only
Earnest Money: 2,000.00 Only

Time : Two months

Name of Work :- SDF/2025/185,R/0 Repair of Restoration and Rain Damages on Lambatbach Shihibagi Kalkhani kashod Pandi Bakhali Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips in and land slide in various RDs 20/125 to 20/930)

Sr. No.	Description of work	Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in	Total amount with all taxes including GST in
					Rs. P	words
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto any lead as per technical specification 302.3.5 and 1611 as per direction of Engineer in charge with in all leads lifts and carriage of materials and other incidents.	745.53	Per Cubic Meter	118.10	88,047.00	Rupees Eighty Eight Thousand Forty Seven Only
					Total:-	88,047.00
	Quated Rate in figure					
	Quated Rate in words					


Executive Engineer
HPPWD Division
Seraj at Khanjali

1

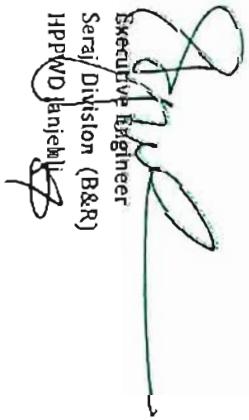
7

BILL OF QUANTITY

Estimate Cost: Rs 87,961.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

Name of Work :- SDF/2025/159 RR Damages on Mandi Gagal Chail Janjehli Chhatri road in km 0/00 to 82/00. (SH:- Removal of slips & land slides in km 72/500 to 73/500).

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge .	744.80	per Cubic metre	118.10	87,961.00	Rupees Eighty Seven Thousand Nine Hundred Sixty One Only
	Total				87,961.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Serai Division (B&R)
 HPPWD Janjehli


BILL OF QUANTITY

Estimate Cost: Rs 87,713.00 Only
Earnest Money: 2,000.00 Only

Time : - Two Months

Name of Work :- SDF/2025/166 RR Damages on Lambatbach Chiuni Chet Shetadhar road in km 0/00 to 25/00. (SH:- Removal of slips & land slides in km 4/635 to 5/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P		Total Amount with all Taxes including GST in Word
					Taxes including GST in Rs. P	Word	
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge .	742.70	per Cubic metre	118.10	87,713.00	Rupees Eighty Seven Thousand Seven Hundred Thirteen Only	
	Total				87,713.00		
	Quated Rate in Figure						
	Quated Rate in Word						


 Executive Engineer
 Seraj Division (B&R)
 HPPW Dhamtari



BILL OF QUANTITY

Estimate Cost: 99,934.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damaged on Link road from Jarol to Dhanyar KM 0/000 to 3/000 (SH:- Removal of slips and land slide in various Rds in KM 0/000 to 2/000).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with In lift upto any height and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	846.18	Cum	118.10	99,934.00	Rupees Ninety Nine Thousand Nine Hundred Thirty Four Only
				Total:-	99,934.00	
	Quated Rate in figure					
	Quated Rate in words					

Executive Engineer
 HPPWD Division
 Surat at Jamnagar



Scanned with OKEN Scanner

BILL OF QUANTITY

Estimate Cost: 88,940.00 Only
 Earnest Money: 2,000.00 Only

Time: Two months

Name of Work :- SDF/2025/165, R/O Repair of Restoration and Rain Damages on Lambathach Shilhbagi Kalhami kashod Pandli Balkhali Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips and land slide in various Rds in KM 4/390 to 5/180) MDR 24.

Sr. No.	Description of work	Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within any lift and lead upto any lead as per technical specification 302.3.5 and 161.1 as per direction of Engineer in charge within all leads lifts and carriage of materials and other incidentals.	753.09	Per Cubic Meter	118.10	88,940.00	Rupees Eighty Eight Thousand Nine Hundred Forty Only
	Total:-				88,940.00	
	Quated Rate in figure					
	Quated Rate in words					


 Executive Engineer
 HPPWD Division
 Serajat (apjent)



BILL OF QUANTITY

Estimate Cost: 88,566.00 Only
 Earnest Money: 2,000.00 Only

Time : Two months

Name of Work :- SDF/2025/173, R/0 Repair of Restoration and Rain Damages on Mandi Gagal Chail Janjehli road KM 0/000 to 82/000 (SH:- Removal of slips and land slide in various Rds in KM 63/000 to 64/000) MDR 24.

Sr. No.	Description of work	Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST In Rs. P	Total amount with all taxes including GST in words
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within any lift and lead upto any lead as per technical specification 302.3.5 and 1611 as per direction of Engineer in charge within all leads lifts and carriage of materials and other incidentals.	749.92	Per Cubic Meter	118.10	88,566.00	Rupees Eighty Eight Thousand Five Hundred Sixty Six Only
	Quated Rate in figure				88,566.00	
	Quated Rate in words					


 Executive Engineer
 HPPWD Division
 Serai at Jauhati

10



BILL OF QUANTITY

Estimate Cost: 98,720.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Jarol to Jugland road KM 0/000 to 6/500 (SH:- Removal of slips and land slide in various Rds in KM 4/400 to 6/500).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1.5m and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	835.90	Cum	118.10	98,720.00	Rupees Ninety Eight Thousand Seven Hundred Twenty Only
				Total:-	98,720.00	
	Quated Rate in Figure					
	Quated Rate in words					

Executive Engineer
 HPPWD Division
 Serial at Janjehlk



BILL OF QUANTITY

Estimate Cost: 88,473.00 Only
 Earnest Money: 2,000.00 Only

Time : Two months

Name of Work :- SDF/2025/182, R/0 Repair of Restoration and Rain Damages on Lambathach Shilhbagi Kallhati kashod Pandli Bakhali
Pandoh road KM 0/000 to 36/000 (SH:- Removal of slips and land slide in various Rds in KM 5/180 to 6/000)

Sr. No.	Description of work	Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within any lift and lead upto any lead as per technical specification 302.3.5 and 1611 as per direction of Engineer in charge within all leads lifts and carriage of materials and other incidentals.	749.14	Per Cubic Meter	118.10	88,473.00	Rupees Eighty Eight Thousand Four Hundred Seventy Three Only
					Total:- 88,473.00	
	Quated Rate in figure					
	Quated Rate in words					


 Executive Engineer
 HPPWD Division
 Serjalanjew

13


Name of Work :- SDF/2025/109 RR Damages on Janjehli Chhatri Magrugalla road in km 0/00 to 11/00 (SH:- Removal of slips & land slides in km 3/015 to 4/324).

BILL OF QUANTITY

Estimate Cost: Rs 72,893.00 Only
Earnest Money: 2,000.00 Only

Time : Two Months

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	617.21	per Cubic metre	118.10	72,893.00	Rupees Seventy Two Thousand Eight Hundred Ninety Three Only
	Total				72,893.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli

//

BILL OF QUANTITY

Name of Work :- SDF/2014/832, Repair and Maintenance of Choldhali to Khanokhali Heliport 0/000 to 1/500 (SH:- Construction of unlined surface drains in KM 0/200 to 0/900 and Removal of slips in various RDs)

Estimate Cost: 99,767.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two months

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P		Total amount with all taxes including GST in Rs. P
					including GST in Rs. P	including GST in Rs. P	
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto any lead as per technical specification 302.3.5 and 1611 as per direction of Engineer in charge with in all leads lifts and carriage of materials and other incidentals.	576.50	Per Cubic Meter	118.10	68,005.00	Rupees Sixty Eight Thousand Eighty Five Only	
2	Construction of unlined surface drains of average cross -sectional area 0.30 sqm in soil to specified lines, grades, levels and dimensions Excavated material to be used in embankment within lift upto any mur and lead of any mur (average lead any mur) as per Technical Specification Clause 307. Mechanical Means as per direction of Engineer in charge with in all leads lifts and carriage of materials and other incidentals.	700.00	Per Cubic metre	45.26	31,682.00	Rupees Thirty One Thousand Six Hundred Eighty Two Only	
	Total:-				99,767.00		
	Quated Rate in figure						
	Quated Rate in words						


 Executive Engineer
 HPPWD Division
 Serai Khanjehli




BILL OF QUANTITY

Estimate Cost: Rs 87,800.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/108 RR Damages on Lambathach Shillibagi Kalhani road in km 0/00 to 36/00. (SH:- Removal of slips & land slides in various Rd's 9/185 to 9/975).

S. No.	Sub Head and item of work	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	per Cubic metre	743.44	118.10 87,800.00	Rupees Eighty Seven Thousand Eight Hundred Only
	Total			87,800.00	
	Quated Rate in Figure				
	Quated Rate in Word				


Executive Engineer
Seri Division (B&R)
HPPWD Janjgadh


BILL OF QUANTITY

Estimate Cost: Rs 87,504.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/192 RR Damages on Chail Janjehli to Bakhawar road in km 0/00 to 5/00. (SH:- Removal of slips & land slides in km 0/00 to 3/00).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	740.93	per Cubic metre	118.10	87,504.00	Rupees Eighty Seven Thousand Five Hundred Four Only
	Total				87,504.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli

16

J

17


BILL OF QUANTITY

Estimate Cost: Rs 87,905.00 Only
 Earnest Money: 2,000.00 Only

Time : - Two Months

Name of Work :- SDF/2025/183 RR Damages on Lambathach Shillibagi kalkhani road in km 0/00 to 36/00. (SH:- Removal of slips & land slides in various Rd's 10/000 to 10/775).

S. No.	Sub Head and item of work	Dkt.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.35 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	744.33	per Cubic metre	118.10	87,905.00	Rupees Eighty Seven Thousand Nine Hundred Five Only
	Total				87,905.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (O&R)
 HPPWD Jajpur


//

BILL OF QUANTITY

Estimate Cost: Rs 87,726.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two Months

Name of Work :- SDF/2025/195 RR Damages on Road to Jughand road in km 0/00 to 6/500. (SH:- Removal of slips & land slides in km 0/00 to 1/500).

S.No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	742.81	per Cubic metre	118.10	87,726.00	Rupees Eighty Seven Thousand Seven Hundred Twenty Six Only
	Quated Rate in Figure			Total	87,726.00	
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (B&R)
 HPPWD Janjehli

BILL OF QUANTITY

Estimate Cost: 99,323.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Jarol to Jugland road KM 0/000 to 6/500 (SH:- Construction of embankment and earth filling in KM 4/210 to 4/255)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5 including carriage of material in all leads and lifts and other incidentals complete and as per the entire satisfaction and direction of Engineer-in-Charge.	486.52	Cum	204.15	99,323.00	Rupees Ninety Nine Thousand Three Hundred Twenty Three Only
			Total:-		99,323.00	
	Quated Rate in figure					
	Quated Rate in words					

*(Executive Engineer)
 HPPWD Division
 Seraj ad aljekhif*

//

20


BILL OF QUANTITY

Estimate Cost: Rs 88,804.00 Only
 Earnest Money: ₹ 000.00 Only

Time : - Two Months

Name of Work :- SDF/2025/181 RR Damages on Rilla - Chandi - Kurshali road in km 0/00 to 8/400 (SH:- Removal of slips & land slides in various Rd's 0/00 to 1/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	751.94	per Cubic metre	118.10	88,804.00	Rupees Eighty Eight Thousand Eight Hundred Four Only
	Total				88,804.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seral Division (P&R)
 HPPWB (Jad) dated

/

1


BILL OF QUANTITY

Estimate Cost: Rs 87,848.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/107 RR Damages on Thunag Kelti Jainshla road in km 0/00 to 9/00. (SH:- Removal of slips & land slides in various Rd's 0/00 to 1/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	743.84	per Cubic metre	118.10	87,848.00	Rupees Eighty Seven Thousand Eight Hundred Forty Eight Only
	Total				87,848.00	
	Quated Rate in Figure					
	Quated Rate in Word					



Executive Engineer
Seral Division (P&R)
HPPWD Jhajjar

BILL OF QUANTITY

Estimate Cost: 99,053.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damaged on Ghumrala to Jugandh road KM 0/000 to 3/000 (SH:- Removal of slips and land slide in various Rds in KM 0/000 to 1/500).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto any weight 2500 and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer in-Charge including carriage of material within all leads , lifts and other incidental charges.	838.72	Cum	118.10	99,053.00	Rupees Ninety Nine Thousand Fifty Three Only
				Total:-	99,053.00	
	Quated Rate In figure					
	Quated Rate In words					


 Executive Engineer
 HPPWD Division
 Serial at Janakpuri

BILL OF QUANTITY

Estimate Cost: 99,048.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Chail Janjchli to Bakhawar road in km 0/000 to 5/000. (SH:- Removal of slips & land slides in km 3/000 to 4/700).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST
						In words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto Quarry height and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	838.63	Cum	118.10	99,048.00	Rupees Ninety Nine Thousand Forty Eight Only
			Total:-		99,048.00	
	Quoted Rate in Figure					
	Quoted Rate in words					


Executive Engineer
 HPPWD Division
 Seral at Janjchli

BILL OF QUANTITY

Estimate Cost: 95,912.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Jarol to Jughand road KM 0/000 to 6/5000 (SH:- Construction of embankment and earth filling in KM 4/255 to 4/300)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5 Including carriage of material in all leads and lifts and other incidentals complete and as per the entire satisfaction and direction of Engineer-in-Charge.	469.81	Cum	204.15	95,912.00	Rupees Ninety Five Thousand Nine Hundred Twelve Only
	Quoted Rate in figure		Total:-		95,912.00	
	Quoted Rate in words					


 Executive Engineer
 IPPWD Division
 Serial/Anjali

BILL OF QUANTITY

Estimate Cost: 98,021.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Theng Banjyad Mandehalu road KM 0/000 to 14/200 (SH:- Removal of slips & land slides in km 0/000 to 2/000).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto cut ^{1000m} and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-charge including carriage of material within all leads , lifts and other incidental charges.	829.98	Cum	118.10	98,021.00	Rupees Ninety Eight Thousand Twenty One Only
				Total:-	98,021.00	
	Quoted Rate in figure					
	Quoted Rate in words					


 Executive Engineer
 HPPWD Division
 Serajat Janjehli

117

BILL OF QUANTITY

Estimate Cost: 99,950.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Chail Janjehli to Tungadhar road 0/000 to 2/000 (SH:- Construction of embankment and earth filling in KM 1/428 to 1/540)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5 including carriage of material in all leads and lifts and other Incidentals complete and as per the entire satisfaction and direction of Engineer-in-Charge.	489.59	Cum	204.15	99,950.00	Rupees Ninety Nine Thousand Nine Hundred Fifty Only
			Total:-		99,950.00	
	Quoted Rate in Figure					
	Quoted Rate in words					


 Executive Engineer
 HPPWD Division
 Serai pu Janjehli

26




Scanned with OKEN Scanner

BILL OF QUANTITY

Estimate Cost: 98,729.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Thachadhar Naloti Balwar Kilan Dawada road KM 0/000 to 8/000(SH:- Removal of slips & land slides in KM 0/000 to 0/700)

Sq. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land side in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1000m and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	835.98	Cum	118.10	98,729.00	Rupees Ninety Eight Thousand Seven Hundred Twenty Nine Only
	Quoted Rate In figure			Total:-	98,729.00	
	Quoted Rate In words					


 Executive Engineer
 HPPWD Division
 Serial no (100) 404



BILL OF QUANTITY

Estimate Cost: 84,091.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two months.

Name of Work:- RR Damages on Kadoun HeliPad to Banadhar road KM 0/000 to 4/700 (SH:- Removal of slips & land slides in
 KM 1/000 to 1/400)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto 1000m and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -In-Charge including carriage of material within all leads , lifts and other incidental charges.	712.03	Cum	118.10	84,091.00	Rupees Eighty Four Thousand Ninety One Only
			Total:-		84,091.00	
	Quoted Rate in figure					
	Quoted Rate in words					

Executive Engineer
 HPPWD Division
 Seriakat Jangali

28



Scanned with OKEN Scanner

BILL OF QUANTITY

Estimate Cost: 99,854.00 Only
Earnest Money: 2,000.00 Only
Time: Two months.

Name of Work:- RR Damages on Thunag Lamusafer road KM KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/180 to 5/255).

Sl. No.	Description of work	No. or Qty,	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto Day weight and lead upto 1000m as per technical specification 3023.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	845.50	Cum	118.10	99,854.00	Rupees Ninety Nine Thousand Eight Hundred Fifty Four Only
				Total:-	99,854.00	
	Quated Rate in Figure					
	Quated Rate in words					


Executive Engineer
HPPWD Division
Serial at Jantehli

BILL OF QUANTITY

Estimate Cost: 98,408.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two months.

Name of Work:- RR Damages on Thunag Kelti Jaishla road KM 0/000 to 9/000 (SH:- Removal of slips & land slides in km 5/500 to 6/885).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes Including GST in Rs. P	Total amount with all taxes Including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto On weight and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge Including carriage of material within all leads , lifts and other incidental charges.	833.26	Cum	118.10	98,408.00	Rupees Ninety Eight Thousand Four Hundred Eight Only
	Quated Rate in figure				98,408.00	
	Quated Rate in words					


Executive Engineer
 HPPWD Division
 Seraj atlam

BILL OF QUANTITY

Estimate Cost: 98,168.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Thachadhar Naloti Balwar Kilan Dawada road KM 0/000 to 8/000(SH:- Removal of slips & land slides in KM 0/700 to 1/300)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes Including GST In Rs. P	Total amount with all taxes Including GST In words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto any height and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	831.23	Cum	118.10	98,168.00	Rupees Ninety Eight Thousand One Hundred Sixty Eight Only
	Total:-				98,168.00	
	Quated Rate In figure					
	Quated Rate In words					


 Executive Engineer
 HPPWD Division
 Serjal Jajebal

(31)



Scanned with OKEN Scanner

BILL OF QUANTITY

Estimate Cost: 98,409.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Bhatakidhar to Khabalech road in KM 0/000 to 6/000 (SH:- Removal of slips & land slides in km
 0/000 to 0/700).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 4.5m ^{4.5m} height and lead upto 1000m as per technical specification 3023.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	833.27	Cum	118.10	98,409.00	Rupees Ninety Eight Thousand Four Hundred Nine Only
				Total:-	98,409.00	
	Quated Rate in figure					
	Quated Rate in words					

Executive Engineer
 HPPWD Division
 Serial at Landfill

32

BILL OF QUANTITY

Estimate Cost: 98,965.00 Only
Earnest Money: 2,000.00 Only
Time: Two months.

Name of Work:- RR Damages on Thunag Lambasaf road KM KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/675 to 5/735).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in Rs. P
						In words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto Only height and lead upto 1000m as per technical specification 3023.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	837.98	Cum	118.10	98,965.00	Rupees Ninety Eight Thousand Nine Hundred Sixty Five Only
			Total:-		98,965.00	
	Quoted Rate in figure					
	Quoted Rate in words					

*(Executive Engineer
IPWD Division
Serial at 10th line)*

//

BILL OF QUANTITY

Estimate Cost: 98,798.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two months.

Name of Work:- RR Damages on Thunag Kelti Jaishla road KM 0/000 to 9/000 (SH:- Removal of slips & land slides in KM 6/885 to 7/400)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto Cum Weight 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	836.56	Cum	118.10	98,798.00	Rupees Ninety Eight Thousand Seven Hundred Ninety Eight Only
				Total:-	98,798.00	
	Quoted Rate in figure					
	Quoted Rate in words					

(Signature)
 Executive Engineer
 RPPWD Division
 Serial at Jalandhar

(34)

BILL OF QUANTITY

Estimate Cost: 95,114.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Kadoun Helipad to Banadhar road KM 0/000 to 4/700 (SH:- Removal of slips & land slides in KM 1/400 to 1/800)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto 1000m and load upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -In-Charge including carriage of material within all leads , lifts and other incidental charges.	805.37	Cum	118.10	95,114.00	Rupees Ninety Five Thousand One Hundred Fourteen Only
			Total:-		95,114.00	
	Quoted Rate in figure					
	Quoted Rate in words					

Executive Engineer
 HPPWD Division
 Seraj at Ropiehli

BILL OF QUANTITY

Estimate Cost: **99,448.00 Only**
 Earned Money: **2,000.00 Only**
 Time: Two months.

Name of Work:- RR Damages on Thunag Banyad Mandelalu road KM 0/000 to 14/200 (SH:- Removal of slips & land slides in km 2/800 to 4/000).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST In Rs. P	Total amount with all taxes including GST In words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1000m and lead upto 1000m as per technical specification 3023.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	842.07	Cum	118.10	99,448.00	Rupees Ninety Nine Thousand Four Hundred Forty Eight Only
			Total:-		99,448.00	
	Quoted Rate In Figure					
	Quoted Rate In words					

Executive Engineer
 HPPWD Division
 Serial No. 14/200

BILL OF QUANTITY

Estimate Cost: 97,305.00 Only
Earnest Money: 2,000.00 Only
Time: Two months.

Name of Work:- RR Damages on Thunag Lambsafer road KM KM 0000 to 6780 (SH:- Removal of slips and land slide in various Rds in KM 5330 to 5435).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes	Total amount with all taxes including GST in Rs. P
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto up to ^{up to} 1000m as per technical specification 3023.5 and 1611, and direction of Engineer -in-Charge including carriage of material within all heads , lifts and other incidental charges.	823.93	Cum	118.10	97,306.00	Rupees Ninety Seven Thousand Three Hundred Six Only
			Total:-		97,306.00	
	Quoted Rate in figure					
	Quoted Rate in words					

Executive Engineer
IIPPWD Division
Serial at Janjgill

BILL OF QUANTITY

Estimate Cost: 99,895.00 Only
Earnest Money: 2,000.00 Only
Time: Two months.

Name of Work:- RR Damages on Chail Janjehli to Tuogadhar road 0/000 to 2/000 (SH:- Construction of embankment and earth filling in KM 1/540 to 1/645)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST In Rs. P	Total amount with all taxes including GST in words
1.00	Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5 including carriage of material in all leads and lifts and other incidentals complete and as per the entire satisfaction and direction of Engineer-in-Charge.	489.32	Cum	204.15	99,895.00	Rupees Ninety Nine Thousand Eight Hundred Ninety Five Only
			Total:-		99,895.00	
	Quoted Rate in Figure					
	Quoted Rate in words					

Executive Engineer
HPPWD Division
Seraj at Janjehli

BILL OF QUANTITY

Estimate Cost: 99,399.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damages on Chedakhad to Bajelal Spchnidhar road KM 0/000 to 8/000 (SH:- Removal of slips & land slides in km 0/000 to 2/000).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto 1000m ^{Qua weight} and head upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	841.65	Cum	118.10	99,399.00	Rupees Ninety Nine Thousand Three Hundred Ninety Nine Only
				Total:-	99,399.00	
	Quoted Rate in figure					
	Quoted Rate in words					

[Signature]
 Executive Engineer
 HPPWD Division
 Serial at [Signature]

(34)



BILL OF QUANTITY

Estimate Cost: 98,981.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two months.

Name of Work:- RR Damages on Thunag Lambsafer road KM KM 0/000 to 6/780 (SH:- Removal of slips and land slide in various Rds in KM 5/510 to 5/585).

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1000m and lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -In-Charge including carriage of material within all leads , lifts and other incidental charges.	838.11	Cum	118.10	98,981.00	Rupees Ninety Eight Thousand Nine Hundred Eighty One Only
			Total:-		98,981.00	
	Quated Rate in Figure					
	Quated Rate in words					

E
Engineering
HPPWD/Division
Seri 1/2019/11/11

BILL OF QUANTITY

Estimate Cost: 99,968.00 Only
 Earnest Money: 2,000.00 Only

Time: Two months

Name of Work :-BSP/2024/779, Repair of road: Bhatkidhar Khablech road KM 0/000 to 6/500 (SH:-Providing and Laying Stone Soling in various RDs in KM 0/360 to 0/740)

Sr. No.	Description of work	No. or Qty.	Unit	Estimated Rate(in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1	Loosening of the ground upto a level of 300 mm below the subgrade level , watered, graded and compacted in layers to meet requirement of Tables 300.1 and 300.2 for subgrade construction as per Technical Specification Clause 303.5.2. with in all leads lifts as per direction of Engineer - in - charge.	51.50	Per Cubic Meter	71.41	3,670.00	Rupees Three Thousand Six Hundred Seventy Eight Only
2	Stone soling properly hand packed filling interstices with Kharanja stone and consolidating with power road roller to the requested gradient and compaction including spreading, watering and rolling of binding materials moorum or earth etc. complete as per H.P.PWD specification. 100 mm spread thickness (finished work including materials and labour) including carriage of materials , with in all leads lifts as per direction of Engineer - in - charge.	51.50	Per Cubic Meter	1,869.70	96,290.00	Rupees Ninety Six Thousand Two Hundred Ninety Only
	Quated Rate in figure				99,968.00	
	Quated Rate in words					

[Signature]
 Executive Engineer
 HPPWD Division
 Serai at andhra

BILL OF QUANTITY

Estimate Cost: Rs 99,919.00 Only
Earnest Money: 2,000.00 Only
Time :- Two Months

1. Name of Work:- RR Damages on Mandi Gagal Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall in wire crate at Rds 81/540 to 81/545).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs.)	Total Amount with all Taxes including GST in Rs. P		Total Amount with all Taxes including GST in Word
					Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word	
1	Earth work in excavation for structures as per drawing and technical specifications clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material of disposal any lead and dressing of sides and bottom and backfilling in trenches with excavated suitable material ordinary soil including carriage of material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge. .	1.80	per Cubic metre	552.35	994.00	Rupees Nine Hundred Ninety Four Only	
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter dia) GI wire conforming to 1.5,280 and 1.5, 4826 in 100mm x 100 (one hundred in to one hundred millimeters) in mesh (woven diagonally) including 10% extra for laps and joints laid with stone boulders weighing not less than 25 kg (twenty five kilo gram) each as per drawing including all leads ,lifts of material and technical specification clause 1301.within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge. .	31.25	per Cubic metre	3140.50	98,141.00	Rupees Ninety Eight Thousand One Hundred Forty One Only	
3	Back filling behind abutment wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 granular material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge. .		0.60 per Cubic metre	1306.55	784.00	Rupees Seven Hundred Eighty Four Only	
	Quated Rate in Figure			Total	99,919.00		
	Quated Rate in Word						


Executive Engineer
Seraj Division (B&R)
HPPWD Jamjehli

f

BILL OF QUANTITY

Estimate Cost: Rs 99,738.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damages on Shivakhad Jhamach Spehnidhar road in km 0/00 to 8/00. (SH:- Removal of slips & land slides in km 4/00 to 6/00).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge .	844.52	per Cubic metre	118.10	99,738.00	Rupees Ninety Nine Thousand Seven Hundred Thirty Eight Only
	Total				99,738.00	
	Quated Rate in Figure					
	Quated Rate in Word					

1
Executive Engineer
Serial Division (B&R)
HPPWD Jarkhetia

43



Scanned with OKEN Scanner

Name of Work:- RR Damages on Thunag Lambsafer road KM KM 0/000 to 6/780 (Sl:- Removal of slips and land slide in various Rds in KM 5/885 to 5/675).

BILL OF QUANTITY

Estimate Cost: 97,966.00 Only
Earnest Money: 2,000.00 Only
Time: Two months.

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material within lift upto On the ^{On the} land lead upto 1000m as per technical specification 302.3.5 and 1611. and direction of Engineer -in-Charge including carriage of material within all leads , lifts and other incidental charges.	829.52	Cum	118.10	97,966.00	Rupees Ninety Seven Thousand Nine Hundred Sixty Six Only
				Total:-	97,966.00	
	Quoted Rate in figure					
	Quoted Rate in words					

Executive Engineer
HPPWD Division
Serial at Jagdeesh

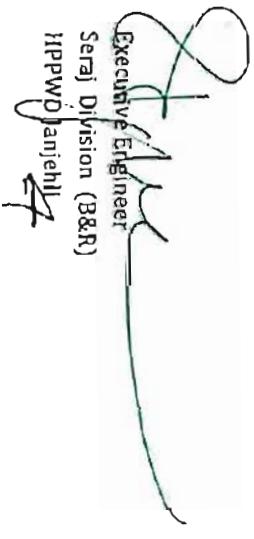
BILL OF QUANTITY

Estimate Cost: Rs 98,178.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & land slides in km 1/765 to 2/300).

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in		Total Amount with all Taxes including GST in Rs. p Word
					Rs. p	Word	
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge .	831.31	per Cubic metre	118.10	98,178.00	Rupees Ninety Eight Thousand One Hundred Seventy Eight Only	
	Total				98,178.00		
	Quated Rate in Figure						
	Quated Rate in Word						


Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli

Name of Work:- RR Damages on Mandi Gagai Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall in wire crate at Rds 81/535 to 81/540).


BILL OF QUANTITY

Estimate Cost: Rs 99,859.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

81/540). Construction of Retaining wall in wire crate at Rds 81/535 to

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Earth work in excavation for structures as per drawing and technical specifications clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material of disposal any lead and dressing of sides and bottom and backfilling in trenches with excavated suitable material ordinary soil including carriage of material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	2.40	per Cubic metre	552.35	1,326.00	Rupees One Thousand Three Hundred Twenty Six Only
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter dia) G.1 wire conforming to 1.5.280 and 1.5, 4826 in 100mm x 100 (one hundred in to one hundred millimeters) in much (woven diagonally) including 10% extra for laps and joints laid with stone boulders weighing not less than 25 kg (twenty five kilogram) each as per drawing including all leads ,lifts of material and technical specification clause 1301.within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	31.25	per Cubic metre	3140.50	98,141.00	Rupees Ninety Eight Thousand One Hundred Forty One Only
3	Back filling behind abutment, wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 granular material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	0.30	per Cubic metre	1306.55	392.00	Rupees Three Hundred Ninety Two Only
	Quated Rate In Figure		Total		99,859.00	
	Quated Rate In Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli


BILL OF QUANTITY

Estimate Cost: 99,717.00 Only
Earnest Money: 2,000.00 Only

Time: Two months

Name of Work :- BSP/2024/778, Repair of road Jaundahr Shrawatash to Bungadhar road KM 0/000 to 1/000 (SH:-Providing and Laying Stone Soling in various RDs in KM 0@15 (to 0/250)

Sr. No.	Description of work	No. or Qty.	Unit	Estimated Rate(in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1	Loosening of the ground upto a level of 300 mm below the subgrade level , watered, graded and compacted in layers to meet requirement of Tables 300.1 and 300.2 for subgrade construction as per Technical Specification Clause 303.5.2. with in all leads lifts as per direction of Engineer - in - charge .	42.50	Per Cubic Meter	71.41	3,035.00	Rupees Three Thousand Thirty Five Only
2	Stone soling properly hand packed filling interstices with Kharanja stone and consolidating with power road roller to the requested gradient and contour including spreading, watering and rolling of binding materials moorun or earth etc . complete as per JRP PWD specification, 100 mm spread thickness (finished work including materials and labour) including carriage of materials , with in all leads lifts as per direction of Engineer - in - charge .	51.71	Per Cubic Meter	1,869.70	96,682.00	Rupees Ninety Six Thousand Six Hundred Eighty Two Only
	Quated Rate in figure			Total:-	99,717.00	
	Quated Rate in words					


 Executive Engineer
 HPPWD Division
 Seraj at [Signature]

R

//

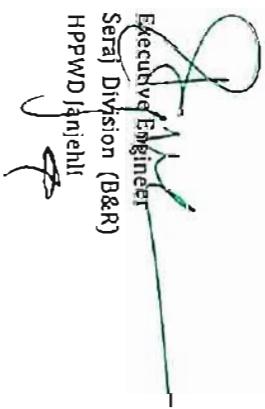
BILL OF QUANTITY

Estimate Cost: Rs 98,188.00 Only
 Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damages on Ghumrala Chakudhar via Bharad HB Gushana road in km 0/00 to 4/500. (SH:- Removal of slips & land slides in km 0/00 to 3/00).

S.No.	SubHead and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Rs. P
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	831.40	per Cubic metre	118.10	98,188.00	Rupees Ninety Eight Thousand One Hundred Eighty Eight Only
	Quated Rate in Figure			Total	98,188.00	
	Quated Rate in Word					


 Executive Engineer
 Sera^t Division (B&R)
 HPPWD Janjehli

48

11

11


BILL OF QUANTITY

Estimate Cost: Rs 98,683.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damages on Shivakhad Jhamach Spehnidhar road in km 0/00 to 8/00. (SH:- Removal of slips & land slides in km 6/00 to 8/00).

S.No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Rupees Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge .	835.59	per Cubic metre	118.10	98,683.00	Rupees Ninety Eight Thousand Six Hundred Eighty Three Only
				Total	98,683.00	
	Quated Rate in Figure					
	Quated Rate in Word					



Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli

BILL OF QUANTITY

Estimate Cost: Rs

**Estimate Cost: Rs 99,849.00 Only
Earnest Money: 2,000.00 Only**

Time : Two Months

Name of Work :- RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & landslides in km 0/750 to 1/765).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Ward
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	845.46	per Cubic metre	118.10	99,849.30	Rupees Ninety Nine Thousand Eight Hundred Forty Nine Only
	Total				99,849.00	
	Quated Rate in Figure					
	Quated Rate in Word					

[Signature]
Executive Engineer
Seraj Division (B&I)
HPPWD Jan ehl


BILL OF QUANTITY

Estimate Cost: Rs 98,789.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damages on Rilla- Chandi- Kursalli road in km 0/00 to 8/400. (SH:- Removal of slips & land slides in km 5/00 to 6/00).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs) per Cubic metre	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Ward
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	836.49	per Cubic metre	118.10	98,789.00	Rupees Ninety Eight Thousand Seven Hundred Eighty Nine Only
	Total				98,789.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Jhunjhunu

BILL OF QUANTITY


Estimate Cost: Rs
Earnest Money:

Time :- Two Months

98,900.00 Only
2,000.00 Only

Name of Work:- RR Damages on Mandi Gagal Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall in wire crate at Rd's 81/520 to 81/526.20).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST In Rs. P	Total Amount with all Taxes including GST In Word
1	Earth work in excavation for structures as per drawing and technical specifications clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material of disposal any lead and dressing of sides and bottom and backfilling in trenches with excavated suitable material ordinary soil including carriage of material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge. .	5.24	per Cubic metre	552.35	2,894.00	Rupees Two Thousand Eight Hundred Ninety Four Only
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter dia) G.1 wire conforming to 1.5.280 and 1.5.4826 in 100mm x 100 (one hundred in to one hundred millimeters) in mesh (woven diagonally) including 10% extra for laps and joints laid with stone boulders weighing not less than 25 kg (twenty five kilogram) each as per drawing including all leads ,lifts of material and technical specification clause 1301,within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge. .	29.06	per Cubic metre	3140.50	91,263.00	Rupees Ninety One Thousands Two Hundred Sixty Three Only
3	Brick filling behind abutment, wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 granular material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge. .	3.63	per Cubic metre	1306.55	4,743.00	Rupees Four Thousands Seven Hundred Forty Three Only
	Quated Rate in Figure				Total	98,900.00
	Quated Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli

BILL OF QUANTITY

Estimate Cost: Rs. 98,475.00 Only
Earnest Money: 2,000.00 Only
Time :- Two Months

Name of Work :- RR Damages on Link road from Chaluthach Rohara to Taralli in GP Dheem Kataru km 0/00 to 3/00 (SH:- Removal of slips & land slides at various Rds in km 0/00 to 2/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	833.83	per Cubic metre	118.10	98,475.00	Rupees Ninety Eight Thousand Four Hundred Seventy Five Only
	Total			98,475.00		
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Serial Division (B&R)
HPPWD Jajehli

53

BILL OF QUANTITY

Estimate Cost: Rs


99,906.00
2,000.00 Only

Earnest Money:

Time :- Two Months

Name of Work :- RR Damages on Ripalpatal Siyandhar road in km 0/00 to 2/500. (SH:- Removal of slips & land slides in km 0/350 to 0/700).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge .	845.94	per Cubic metric	118.10	99,906.00	Rupees Ninety Nine Thousand Nine Hundred Six Only
	Total				99,906.00	
	Quated Rate in Figure					
	Quated Rate in Word					




Executive Engineer
Seraj Division (B&R)
HPPWD (Rajpuri)

BILL OF QUANTITY

Estimate Cost: Rs 99,017.00 Only
Earnest Money: 2,000.00 Only

Name of Work:- RR Damages on Mandi Gagal Chail Janjehli road KM 0/00 to 82/000 (SH :- Construction of Retaining wall in wire crate at Rds 81/526.20 to 81/532.20).

S.No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs.)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word	
1	Earth work in excavation for structures as per drawing and technical specifications clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material, disposal any lead and dressing of sides and bottom and backfilling in trenches with excavated suitable material ordinary soil including carriage of material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	5.24	per Cubic metre	552.35	2,894.00	Rupees Two Thousand Eight Hundred Ninety Four Only	
2	Providing and laying of boulder apron laid in wire crates with 4mm (four millimeter dia) G.I wire conforming to 1.5,280 and 1.5,4826 in 100mm x 100 (one hundred in to one hundred millimeters) in mesh (woven diagonally) including 10% extra for laps and joints laid with stone boulders weighing not less than 25 kg (twenty five kilo gram) each as per drawing including all leads, lifts of material and technical specification clause 1301, within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	29.06	per Cubic metre	3140.50	91,263.00	Rupees Ninety One Thousand Two Hundred Sixty Three Only	
3	Back filling behind abutment, wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 granular material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	3.72	per Cubic metre	1,306.55	4,860.00	Rupees Four Thousand Eight Hundred Sixty Only	
	Quated Rate in Figure			Total	99,017.00		
	Quated Rate in Word						


Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli


/ /

BILL OF QUANTITY

Estimate Cost: Rs 99,663.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two Months

Name of Work :- RR Damages on Rilla- Chandi- Kurshali road in km 0/00 to 8/400. (SH:- Removal of slips & land slides in km 3/00 to 5/00).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge .	843.89	per Cubic metre	118.10	99,663.00	Rupees Ninety Nine Thousand Six Hundred Sixty Three Only
					Total	99,663.00
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (B&R)
 HPPWD Jajhpurh

56

BILL OF QUANTITY

Estimate Cost: Rs 99,581.00 Only
Earnest Money: 2,000.00 Only
Time :- Two Months

Name of Work :- RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & land slides in km 0/300 to 0/750).

S. No.	Sub Head and item of work	Dly.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	843.19	per Cubic metre	118.10	99,581.00	Rupees Ninety Nine Thousand Five Hundred Eighty One Only
				Total	99,581.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli

17

S-2

BILL OF QUANTITY

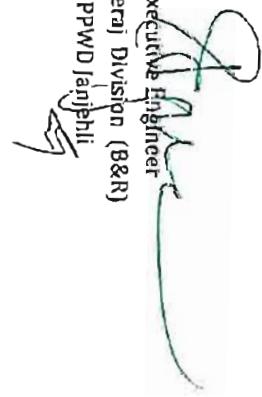
Estimate Cost: Rs 98,495.00 Only
 Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damages on Sendha to Narthi road in km 0/00 to 2/500. (SH:- Removal of slips & land slides in km 0/00 to 2/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	834.00	per Cubic metre	118.10	98,495.00	Rupees Ninety Eight Thousand Four Hundred Ninety Five Only
	Total				98,495.00	
	Quated Rate in Figure					
	Quated Rate in Word					

Executive Engineer
 Seral Division (B&R)
 HPPWD Janjehli



//

//

(59)

BILL OF QUANTITY

Estimate Cost: Rs 98,361.00 Only
Earnest Money: 2,000.00 Only
Time :- Two Months

Name of Work :- RR Damages on Beyond to Tharheni road G.P. Janjehli in km 0/00 to 1/500. (SH:- Removal of slips, debris & land slides in various Rds).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P		Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all loads and lifts and as per direction of Engineer in charge.	832.86	per Cubic metre	118.10	98,361.00	Rupees Ninety Eight Thousand Three Hundred Sixty One Only	
	Total				98,361.00		
	Quated Rate in Figure						
	Quated Rate in Word						


Executive Engineer
Seraj Division (B&R)
HPWD Janjehli

BILL OF QUANTITY

Estimate Cost: Rs 98,851.00 Only
 Earnest Money: 2,000.00 Only

Time : - Two Months

Name of Work :- RR Damages on Deji Banshil to Shikarimata road in km 0/00 to 3/00. (SH:- Removal of slips & land slides in km 0/00 to 0/300).

S.No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs) per Cubic metre	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Ward
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	837.01	per Cubic metre	118.10	98,851.00	Rupees Ninety Eight Thousand Eight Hundred Fifty One Only
	Total				98,851.00	
	Quated Rate in Figure					
	Quated Rate in Word					



 Executive Engineer
 Seraj Division (B&R)
 HPPWD Janjgadh

BILL OF QUANTITY

Estimate Cost: Rs. 98,035.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two Months

Name of Work :- RR Damages on Janjehli Rigarth Shikarimta road in km 0/00 to 14/400. (SH:- Removal of debris from berm, removal of slips/ land slides invarious Rds in km 3/00 to 7/300).

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	830.10	per Cubic metre	118.10	98,035.00	Rupees Ninety Eight Thousand Thirty Five Only
				Total	98,035.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seral Division (B&R)
 HPPWD (apjehli)

(61)

//


P

BILL OF QUANTITY

Estimate Cost: Rs 99,222.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

Name of Work :- RR Damages on Raingalu to Nagakeoli road in km 0/00 to 4/00. (SH:- Removal of slips & land slides in km 1/00 to 2/900).

S.No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	840.15	per Cubic metre	118.10	99,222.00	Rupees Ninety Nine Thousand Two Hundred Twenty Two Only
	Total				99,222.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (B&R)
 HPPWD, Bangalore

(62)

BILL OF QUANTITY

四

110

62

**Estimate Cost: Rs 99,323.00 Only
Earnest Money: 2,000.00 Only
Time: Two Months**

99,323.00 Only
2,000.00 Only

...and slides in the VIMS monograph.

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (in Rs) per Cubic metre	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	841.01	per Cubic metre	118.10	99,323.00	Rupees Ninety Nine Thousand Three Hundred Twenty Three Only
			Total		99,323.00	
	Quated Rate in Figure					
	Quated Rate in Word					

Executive Engineer
Seraj Division (B&R)
HPPWD Janjehli

//

BILL OF QUANTITY

Estimate Cost: Rs 98,021.00 Only
 Earnest Money: 2,000.00 Only
 Time: - Two Months

Name of Work :- RR Damages on Thunag Banyad Mandehalu road in km 0/00 to 14/200. (SH:- Removal of slips & land slides in km 11/500 to 13/000).

S. No.	Sub Head and item of work	Dty.	Unit	Estimated Rate (in Rs) per Cubic metre	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Rupees Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	829.98	per Cubic metre	118.10	98,021.00	Ninety Eight Thousand Twenty One Only
	Total				98,021.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Serial Revision (B&R)
 HPPWU Janjehli

64




Scanned with OKEN Scanner

Name of Work:- RK Damaged on various roads under Janjehli Sub Division ((SM:- Hiring of Tractor for carriage of muck/debris in various road under Janjehli Section-41) Job No-1

BILL OF QUANTITY

Estimate Cost: 98,800.00 Only
Earnest Money: 2,000.00 Only
Time: Two months.

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (In. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Hiring of tractor with trolley of hydraulic lift system for carriage of material to different sites of work with in all leads and lift and to the entire satisfaction of the Engineer - in charge. The tractor should work minimum 0.00 Hours from 9.00 AM to 5.00 PM daily. Any loss to the public / private property or any accident etc . happened during the course of hiring period , shall be absolute responsibility of the tractor owner which shall have to be fully compensated by him in all case . The fuel and the tractor operator and other stays for tractor operator will be provided by the tractor owner . The repair and spare of tractor also will be borne by the contractor / owner. The daily log book will be maintained at site which should be duly verified by the Engineer- in charge.	52.00	Per Days	1900.00	98,800.00	Rupees Ninety Eight Thousand Eight Hundred Only
		Total:-			98,800.00	
	Quated Rate in figure					
	Quated Rate in words					


Executive Engineer
HPPWD Division
Serial at Janjehli

BILL OF QUANTITY

Estimate Cost: 99,200.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damaged on various roads under Janjehli Sub Division (SH:- Hiring of Tipper for carriage of different material in various roads under Bagachanog Section) Job No-1

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST In words
1.00	Hiring of Tipper for carriage / disposal of debris to dumping site of work with lift to suitable place within all leads and lifts to the entire satisfaction of the Engineer-in Charge. The Tipper should work minimum 9.00 AM to 5.00 PM daily any loss to the public / private property or any accident etc. happened during the course of hiring period shall be absolute responsibility of the Tipper owner which shall have to be fully compensated by him in all cases the fuel and Tipper driver and lodging & boarding of operational staff will be provided by the Tipper owner the repair and spare including watch and ward of Tipper also borne by the contractor / owner. The daily log book will be maintained at site which should be duly verified by the Engineer-in charge.	31.00	Per Day	3200.00	99,200.00	Rupees Ninety Nine Thousand Two Hundred Only
	Quoted Rate in figure		Total:		99,200.00	
	Quoted Rate in words					


 Executive Engineer
 IIPPWD Division
 Sector at Jhankuli

BILL OF QUANTITY

Estimate Cost: 99,200.00 Only
 Earnest Money: 2,000.00 Only
 Time: Two months.

Name of Work:- RR Damaged on various roads under Janjehli Sub Division (SH:- Hiring of Tipper for carriage of different material in various roads under Janjehli Section-I) Job No-II

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Hiring of Tipper for carriage / disposal of debris to dumping site of work with lift to suitable place with in all leads and lifts to the entire satisfaction of the Engineer-in Charge. The Tipper should work minimum 9.00 AM to 5.00 PM daily any loss to the public / private property or any accident etc. happened during the course of hiring period shall be absolute responsibility of the Tipper owner which shall have to be fully compensated by him in all cases the fuel and Tipper driver and lodging & boarding of operational staff will be provided by the Tipper owner the repair and spare including watch and ward of Tipper also borne by the contractor / owner. The daily log book will be maintained at site which should be duly verified by the Engineer-in charge.	31.00	Per Day	3200.00	99,200.00	Rupees Ninety Nine Thousand Two Hundred Only
			Total:-		99,200.00	
	Quoted Rate in figure					
	Quoted Rate in words					


 Executive Engineer
 HPPWD Division
 Sector 1 Janjehli

BILL OF QUANTITY

Estimate Cost: 96,000.00 Only
 Earnest Money: 2,000.00 Only
 Time : Two months.

Name of Work:- RR Damaged on various roads under Janjehli Sub Division (Slk:- Hiring of Tipper for carriage of different material in various roads under Janjehli Section-I) Job No-1

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Hiring of Tipper for carriage / disposal of debris to dumping site of work with lift to suitable place within all leads and lifts to the entire satisfaction of the Engineer-in Charge. The Tipper should work minimum 9.00 AM to 5.00 PM daily any loss to the public / private property or any accident etc. happened during the course of hiring period shall be absolute responsibility of the Tipper owner which shall have to be fully compensated by him in all cases the fuel and Tipper driver and lodging & boarding of operational staff will be provided by the Tipper owner the repair and spare including watch and ward of Tipper also borne by the contractor / owner. The daily log book will be maintained at site which should be daily verified by the Engineer-in charge.	30.00	Per Day	3200.00	96,000.00	Rupees Ninety Six Thousand Only
				Total:-	96,000.00	
	Quoted Rate in figure					
	Quoted Rate in words					


 Executive Engineer
 HPPWD Division
 Serial at Janjehli


BILL OF QUANTITY

Estimate Cost: 80,000.00 Only
 Earnest Money: 2,000.00 Only

Time :One Month

Name of Work :- Preparation of 4Nos roads/Sites PPR of Landslide and flood Mitigation Under SDMF. (SI :- Preparation of PRELIMINARY PROJECT REPORT, Landslide Mitigation Measures Near Lambatbach Govt Degree College on Mandi Gagal Chail Janjahli road (MDR -24) RD 73/120 to 73/270,Landslide Mitigation Measures Near Government Pharmacy College administrative block ,staff residence and Girls Hostel Block,Landslide Mitigation Measures Kelodhar to Patikari Road km 10/150 to 10/450 and Landslide Mitigation Measures Near Dezi Village on Thunag Puriot Lambashater Road km 4/450 to 4/650)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Preparation of PRELIMINARY PROJECT REPORT for Landslide and flood Mitigation Measures as per SDMF guidelines including Uploading Soft copy of PPR in SDMF portal and Preparation of Power point Presentation. If any correction / amendments is desired by SDMF/DC office ,the same may be corrected as desired and directed by the Engineer- in - charge complete in all respect.					
1.01	Landslide Mitigation Measures Near Lambatbach Govt Degree College on Mandi Gagal Chail Janjahli road (MDR -24) RD 73/120 to 73/270	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
1.02	Landslide Mitigation Measures Near Government Pharmacy College Administrative block ,staff residence and Girls Hostel Block	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
1.03	Landslide Mitigation Measures Kelodhar to Patikari Road km 10/150 to 10/450	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
1.02	Landslide Mitigation Measures Near Dezi Village on Thunag Puriot Lambashater Road km 4/450 to 4/650	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
			Total:-		80,000.00	
	Quated Rate in Figure					
	Quated Rate in words					


 Executive Engineer,
 HYDRO Division
 Serai at Puriot



BILL OF QUANTITY

Estimate Cost:

80,000.00 Only


Earnest Money:

2,000.00 Only

Time :One Month

Name of Work :- Preparation of 4Nos roads/Sites PPR of Landslide and flood Mitigation Under SDMF. (SH :- Preparation of PRELIMINARY PROJECT REPORT, Landslide Mitigation Measures Near Auhun Village on Mandi Gagal Chail Janjali road (MDR-24) km 61/470 to 61/510, Landslide Mitigation Measures Near Dogra Village Lehthach Panchayat Thachadhar to Naloti road km 1/500 to 0/580, Landslide Mitigation Measures Near Dharwarthach Village Panchayat Shilbagi Lambathach Shillbagi Kalthani road KM 12/930 to 13/010 and Landslide Mitigation Measures on Mandi-Gagal-Chail-Janjali-Ranabag Road Portion At KM 55/585 to 55/670, KM 58/940 to 59/010 under NLRMP).

Sl. No.	Description of work	No. of Qty.	Unit	Estimated Rate (in. Rs.)	Total amount with all taxes including GST in Rs. P	Total amount with all taxes including GST in words
1.00	Preparation of PRELIMINARY PROJECT REPORT for Landslide and flood Mitigation Measures as per SDMF guidelines including Uploading Soft copy of PPR in SDMF portal and Preparation of Power point Presentation. If any correction / amendments is desired by SDMF/DC office ,the same may be corrected as desired and directed by the Engineer- in - charge complete in all respect.					
1.01	Landslide Mitigation Measures Near Auhun Village on Mandi Gagal Chail Janjali road (MDR -24) km 61/470 to 61/510	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
1.02	Landslide Mitigation Measures Near Dogra Village Lehthach Panchayat Thachadhar to Naloti road km 1/500 to 1/580	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
1.03	Landslide Mitigation Measures Near Dharwarthach Village Panchayat Shilbagi Lambathach Shillbagi Kalthani road KM 12/930 to 13/010	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
1.02	Landslide Mitigation Measures on Mandi-Gagal-Chail-Janjali-Ranabag Road Portion At KM 55/585 to 55/670, KM 58/940 to 59/010 under NLRMP	1.00	Per Job	20,000.00	20,000.00	Rupees Twenty Thousand Only
	Quated Rate in figure			Total:-	80,000.00	
	Quated Rate in words					


 Executive Engineer,
 HPWD Division
 Seraj at Janjali