



**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT**

Telephone No: 01907-256827

E-mail: ee-seraj-hp@gov.in

No. PW-SRJ-CB-TA/2025-26- 4577

Dated:- 02 - 09 - 2025

To

The Executive Engineer (I.T.) Cell,
HPPWD, Nirman Bhawan, Nigam Vihar,
Shimla-2.


Subject: -

**Regarding publication of the tender on
departmental site.**

Enclosed please find herewith the copies of notice
inviting tender for the up-loading on department web-site before 09.09.2025
as per notification issued by the Pr. Sec. (PW) to the Govt. of HP vide letter
No. PBW(B) A(3)1/2024 dated 03.01.2024.

**Certified that the works mentioned in the tender
notice are urgent in nature and in co-ordination with the disaster
management Act. 2005.**

DA: - As Above.


Executive Engineer,
HPPWD Division,
Seraj at Janjehli.

HIMACHAL PRADESH PUBLIC WORKS DEPARTMENT

Telephone No: 01907-256827
E-mail: ee-seraj-hp@gov. in

NOTICE INVITING TENDER

Sealed percentage rate short terms tender(s) on PWD form No. 6 & 8 are hereby invited by the Executive Engineer, HP.PWD Division, Seraj at Janjehli Distt. Mandi (HP) on behalf of the Governor of H.P. for the following works from registered contractors in HP.PWD (B&R) in appropriate class, so as to reach in this office on 10.09.2025 upto 10.30 A.M. and will be opened on the same day at 11.00 A.M. in the presence of contractors or their authorised representative who wish to be present at that time. The application for obtaining the tender form will be received on 09.09.2025 between 10.00 A.M. to 01:00 P.M. The tender form can be had from this office against cash payment (Non-refundable) on 09.09.2025 between 11.00 AM to 05.00 PM.

The earnest money in the shape of National Saving Certificate/Time Deposit Account/ Saving Account of the Post office in Himachal Pradesh duly pledged in favour of the Executive Engineer, HP.PWD Division, Seraj at Janjehli Distt. Mandi H.P. must accompany with the tender form. Ambiguous/ Telegraphically/conditional tenders or tender by FAX shall not be entertained/considered in any case. The tenders without earnest money shall summarily be rejected. The offer of the tender shall be kept open for 90 days. The Executive Engineer, HP.PWD Division, Seraj at Janjehli reserve the right to reject/accept any offer of tender without assigning any reasons.

Sr. No.	Name of work	Estimated Cost	Earnest Money	Cost of Tender	Time allowed
1	SDF/2025/102 R/O Restoration and Rain damages on Tapnali Khauli road in Km. 0/00 to 15/00. (SH: - Removal of slips in between Km. 9/500 to 11/000).	89,886.00	2000.00	350.00	Two Months
2	SDF/2025/177 R/O Restoration and Rain damages on Tapnali Khauli road in Km. 0/000 to 15/000. (SH: - Removal of slips in between Km. 2/000 to 3/500).	89,921.00	2000.00	350.00	Two Months
3	SDF/2025/178 R/O Restoration and Rain damages on Tapnali Khauli road in Km. 0/000 to 15/000. (SH: - Removal of slips in between Km. 12/500 to 14/000).	89,957.00	2000.00	350.00	Two Months
4	SDF/2025/101 R/O Restoration and Rain damages on Tapnali Khauli road in Km. 0/000 to 15/000. (SH: - Removal of slips in between Km. 0/000 to 2/000).	89,762.00	2000.00	350.00	Two Months
5	SDF/2025/106 R/O Restoration and Rain damages on Ghat Tapnali road in Km. 0/000 to 18/000. (SH: - Removal of slips in between Km. 0/000 to 1/500).	89,904.00	2000.00	350.00	Two Months
6	SDF/2025/99 R/O Restoration and Rain damages on Kelodhar Chhattri road in Km. 19/000 to 32/000. (SH: - Hiring of JCB for removal of slips in between Km. 24/000 to 25/500).	89,886.00	2000.00	350.00	Two Months
7	SDF/2025/175 R/O Restoration and Rain damages on Kelodhar Chhattri road in Km. 19/000 to 32/000. (SH: - Hiring of JCB for removal of slips in between Km. 21/000 to 22/500).	89,904.00	2000.00	350.00	Two Months
8	SDF/2025/98 R/O Restoration and Rain damages on Kelodhar Chhattri road in Km. 19/000 to 32/000. (SH: - Removal of slips in between Km. 19/000 to 20/500).	89,974.00	2000.00	350.00	Two Months
9	SDF/2025/176 R/O Restoration and Rain damages on Kelodhar Chhattri road in Km. 19/000 to 32/000. (SH: - Removal of slips in between Km. 25/500 to 27/000).	89,780.00	2000.00	350.00	Two Months

10	SDF/2025/100 R/O Restoration and Rain damages on Seri Kakradhar road in Km. 0/000 to 6/000. (SH: - Removal of slips in between Km. 3/500 to 5/000).	89,957.00	2000.00	350.00	Two Months
11	SDF/2025/103 R/O Restoration and Rain damages on Handel to Nihrikhad road in Km. 0/000 to 7/465. (SH: - Removal of slips in between Km. 0/000 to 1/500).	89,904.00	2000.00	350.00	Two Months
12	SDF/2025/104 R/O Restoration and Rain damages on Mehach Deori road in Km. 0/000 to 7/000. (SH: - Removal of slips in between Km. 0/000 to 1/500).	89,921.00	2000.00	350.00	Two Months
13	SDF/2025/179 R/O Restoration and Rain damages on Mehach Deori road in Km. 0/000 to 7/000. (SH: - Removal of slips in between Km. 3/000 to 4/500).	89,992.00	2000.00	350.00	Two Months
14	SDF/2025/105 R/O Restoration and Rain damages on Ruhmani to Baryogi via Mahruti road in Km. 0/000 to 4/500. (SH: - Removal of slips in between Km 0/000 to 1/500).	89,921.00	2000.00	350.00	Two Months
15	RR Damages Chhatrri Magrugalla via Lassi road in Km. 0/000 to 8/825. (SH: - Removal of slips in Km. 2/800 to 2/845 and 3/000 to 3/060).	99,363.00	2000.00	350.00	Two Months
16	RR Damaged on Handel to Nihri khad road in Km. 0/000 to 7/465. (SH: - Removal of slips in between Km. 4/000 to 7/465).	99,169.00	2000.00	350.00	Two Months
17	RR Damaged on Ranabag Bihani Seri road in Km. 0/000 to 12/000. (SH: - Removal of slips and land slide in between Km. 9/300 to 12/000).	99,541.00	2000.00	350.00	Two Months
18	RR Damaged on Chhatrri Gadagusain road in Km. 0/000 to 29/000. (SH: - Removal of slips in between Km. 13/000 to 20/000).	99,487.00	2000.00	350.00	Two Months
19	RR Damaged on Tapnali Khauli road in Km. 0/000 to 15/000. (SH: - Removal of slips in between Km. 5/000 to 8/000).	99,009.00	2000.00	350.00	Two Months
20	RR Damaged on Tapnali Ghat road in Km. 0/000 to 18/000. (SH: - Removal of slips in between Km. 13/000 to 18/000).	99,700.00	2000.00	350.00	Two Months
21	RR Damaged on Mehach Deori road in Km. 0/000 to 7/000. (SH: - Removal of slips in between Km. 4/000 to 7/000).	99,523.00	2000.00	350.00	Two Months
22	RR Damaged on Nagan Chhatrri road in Km. 13/000 to 22/000. (SH:- Removal of slips in between Km. 13/000 to 18/000)	99,842.00	2000.00	350.00	Two Months
23	RR Damaged on Gadadusain Thanwarigad Lababan road in Km. 0/000 to 7/000. (SH: - Removal of slips in between Km. 0/000 to 4/000).	99,665.00	2000.00	350.00	Two Months
24	RR Damaged on Thanwarigad via Dugha Pokhar road in Km. 0/000 to 6/500. (SH: - Removal of slips in Km. 0/000 to 4/000).	99,399.00	2000.00	350.00	Two Months
25	RR Damaged on Baryogi Thanser Magrugalla road in Km. 0/000 to 8/510. (SH: - Removal of slips and land slide in Km. 2/400 to 2/520).	98,991.00	2000.00	350.00	Two Months
26	RR Damaged on Jognidhar Bahlidhar road in Km. 0/000 to 4/000. (SH: - Removal of slips in Km. 0/000 to 4/000).	99,806.00	2000.00	350.00	Two Months
27	RR Damaged on Bethwan Badech road in Km. 0/000 to 4/000. (SH: - Removal of slips in Km. 0/000 to 4/000).	99,399.00	2000.00	350.00	Two Months
28	RR Damaged on Baryogi Kakradhar road in Km. 0/000 to 4/000. (SH: - Removal of slips in Km. 0/000 to 4/000).	99,027.00	2000.00	350.00	Two Months

29	RR Damaged on Dhishani Panchayat Ghar Kandhi Paul Shilh road in Km. 0/000 to 4/000. (SH: - Removal of slips in between Km. 0/000 to 4/000).	99,859.00	2000.00	350.00	Two Months
30	BSP/2023/929 Construction of Tractor road with Retaining wall at village Nalauti near the house of Smt. Champa Kumari. (SH: - Construction of Dry rubble stone Retaining wall at RD 0/120 to 0/127.20).	99,635.00	2000.00	350.00	Two Months

Terms and conditions:-

1. The contractors/firms are required to quote their rates clearly percentage rate, failing which the tender is liable to be rejected.
2. The contractors/firms are required to quote their rates clearly both in words as well as in figures, failing which the tender is liable to be rejected.
3. The contractor will produce show their enlistment/renewal documents at the time of obtaining tender.
4. Latest Income tax and GST tax clearance certificates as well as PAN Number and GST number must be attached with the application failing which tender documents will not be issued.
5. The tender forms will be issued to only those contractors who have not more than two works in hand in any of HP.PWD. Circles.
6. The tender forms will not be issued to those contractors whose performance is not found satisfactory.
7. As per Govt. Notification No. PW/CTR/32-20-General Isnt. CPWD/2020-37996-38095 dated 13.03.2023 the tender above 5% bill be summarily rejected and tenders amount below 30% of amount put to tender will also be accepted.

Executive Engineer,
HPPWD Division,
Seraj at Janjehli

No. PW-SRJ/NIT/2025-26- 4569-76

Dated:- 02-09-2025

1. Copy to the Director, Information and publication Department HP Shimla for favour of publication in one regional newspaper and one National newspaper.
2. Copy to the superintending Engineer 1st Circle HPPWD mandi for information please
3. Copy to Sub- Divisional office (Civil) Thunag Tehsil Thunag for information please.
4. Copy to Block Development office Janjehli Tehsil Thunag Distt. Mandi HP.
5. Copy to Assistant Engineer Chhattri Sub-Division under this Division.
6. Copy to Drawing Branch & Account Branch
7. Notice board of this office.

Executive Engineer,
HPPWD Division,
Seraj at Janjehli

BILL OF QUANTITY


Estimate Cost: Rs 89,886.00 Only

Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/102 R/O Restoration and Rain damages on Tapnali Khauli road in km 0/00 to 15/00. (SH:- Removal of slips in between km 9/500 to 11/000).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentials in all leads and lifts and as per direction of Engineer in charge.	761.10	per Cubic metre	118.10	89,886.00	Rupees Eighty Nine Thousand Eight Hundred Eighty Six Only
			Total		89,886.00	
	Quoted Rate in Figure					
	Quoted Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Jajrehla


BILL OF QUANTITY

Estimate Cost: Rs 89,921.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/177 R/O Restoration and Rain damages on Tapnali Khauli road in km 0/00 to 15/00. (SH:- Removal of slips in between km 2/000 to 3/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.40	per Cubic metre	118.10	89,921.00	Rupees Eighty Nine Thousand Nine Hundred Twenty One Only
	Quated Rate in Figure		Total		89,921.00	
	Quated Rate in Word					


 Executive Engineer
 Serai Division (B&R)
 HPPWD Kanlehi

BILL OF QUANTITY

Estimate Cost: Rs

89,957.00 Only

Earnest Money:

2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/178 R/O Restoration and Rain damages on Tapnali Khauli road in km 0/00 to 15/00. (SH:- Removal of slips in between km 12/500 to 14/000).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.70	per Cubic metre	118.10	89,957.00	Rupees Eighty Nine Thousand Nine Hundred Fifty Seven Only
			Total		89,957.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj/ Division (B&R)
 HPPWD Janjehli


BILL OF QUANTITY

Estimate Cost: Rs 89,762.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/101 R/O Restoration and Rain damages on Tapnali Khauli road in km 0/00 to 15/00. (SH:- Removal of slips in between km 0/000 to 2/000).

S.No.	Sub Head and item of work	Dyt.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	760.05	per Cubic metre	118.10	89,762.00	Nine Thousand Seven Hundred Sixty Two Only
			Total		89,762.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Serai/ Division (B&R)
HPPWD anjli

BILL OF QUANTITY

Estimate Cost: Rs 89,904.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/106 R/O Restoration and Rain damages on Chat Tapnali road in km 0/00 to 18/00. (SH:- Removal of slips in between km 0/000 to 1/500).

S. No.	Sub Head and Item of work	Qty	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.25	per Cubic metre	118.10	89,904.00	Rupees Eighty Nine Thousand Nine Hundred Four Only
			Total		89,904.00	
	Quoted Rate in Figure					
	Quoted Rate in Word					

Executive Engineer
Serial Division (B&R)
HPPWD Tapnali

BILL OF QUANTITY

Estimate Cost: Rs

Earnest Money:

Time :- Two Months

89,886.00 Only
2,000.00 Only

Name of Work :- SDF/2025/99 R/O Restoration and Rain damages on Kelodhar Chhatri road in km 19/00 to 32/00. (SH:- Hiring of JCB for removal of slips in between km 24/000 to 25/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including cartage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.10	per Cubic metre	118.10	89,886.00	Rupees Eighty Nine Thousand Eight Hundred Eighty Six Only
			Total		89,886.00	
	Quated Rate in Figure					
	Quated Rate in Word					

Executive Engineer
Serial Division (B&R)
HPPWD, Jalandhar

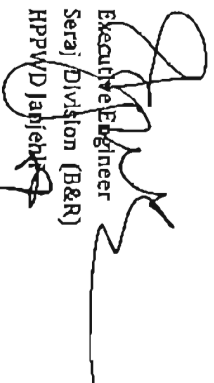
BILL OF QUANTITY

Estimate Cost: Rs 89,904.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/175 R/O Restoration and Rain damages on Kelodhar Chhatri road in km 19/00 to 32/00. (SH:- Hiring of JCB for removal of slips in between km 21/000 to 22/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.25	per Cubic metre	118.10	89,904.00	Rupees Eighty Nine Thousand Nine Hundred Four Only
			Total		89,904.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seraj Division (B&R)
HPPWD Jajpur


BILL OF QUANTITY

Estimate Cost: Rs 89,974.00 Only
 Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/98 R/O Restoration and Rain damages on Kelodhar Chhatri road in km 19/00 to 32/00. (SH:- Removal of slips in between km 19/000 to 20/500).

S. No.	Sub Head and item of work	Qty	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.85	per Cubic metre	118.10	89,974.00	Rupees Eighty Nine Thousand Nine Hundred Seventy Four Only
			Total		89,974.00	
	Quoted Rate in Figure					
	Quoted Rate in Word					


 Executive Engineer
 Serai Division (B&R)
 HPPWD/Jan/ebh


BILL OF QUANTITY

Estimate Cost: Rs 89,780.00 Only
 Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/176 R/O Restoration and Rain damages on Kelodhar Chhatri road in km 19/00 to 32/00. (SH:- Removal of slips in between km 25/500 to 27/000).

S. No.	Sub Head and item of work	Dyt.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	760.20	per Cubic metre	118.10	89,780.00	Rupees Eighty Nine Thousand Seven Hundred Eighty Only
			Total		89,780.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seral Division (B&R)
 HPPWD Jabiehl

10


BILL OF QUANTITY

Estimate Cost: Rs 89,957.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/100 R/O Restoration and Rain damages on Seri Kakradhar road in km 0/00 to 6/00. (SH:- Removal of slips in between km 3/500 to 5/000).

S. No.	Sub Head and item of work	DyL	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	764.70	per Cubic metre	118.10	89,957.00	Rupees Eighty Nine Thousand Nine Hundred Fifty Seven Only
			Total		89,957.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seral Division (B&R)
HPPWD Janjehda

BILL OF QUANTITY

Estimate Cost: Rs 89,904.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/103 R/O Restoration and Rain damages on Handel to Nihrikhad road in km 0/00 to 7/465. (SH:- Removal of slips in between km 0/000 to 1/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.25	per Cubic metre	118.10	89,904.00	Rupees Eighty Nine Thousand Nine Hundred Four Only
			Total		89,904.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seral Division (B&R)
HPPWD Janjati

BILL OF QUANTITY

Estimate Cost: Rs

89,921.00 Only

Earnest Money:

2,000.00 Only

Time :- Two Months

Name of Work :- SDF/2025/104 R/O Restoration and Rain damages on Mehach Deori road in km 0/00 to 7/00. (SH:- Removal of slips in between km 0/000 to 1/500).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.40	per Cubic metre	118.10	89,921.00	Rupees Eighty Nine Thousand Nine Hundred Twenty One Only
			Total		89,921.00	
	Quated Rate in Figure					
	Quated Rate in Word					



 Executive Engineer
 Seral Division (B&R)
 HPPWD, Jangladesh

15 BILL OF QUANTITY

Name of Work :- SDF/2025/179 R/O Restoration and Rain damages on Mehach Deori road in km 0/00 to 7/00. (SH:- Removal of slips in between km 3/000 to 4/500).

Estimate Cost: Rs 89,992.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of stops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	762.00	per Cubic metre	118.10	89,992.00	Rupees Eighty Nine Thousand Nine Hundred Ninety Two Only
			Total		89,992.00	
	Quated Rate in Figure					
	Quated Rate in Word					



 Executive Engineer
 Sera/ Division (B&R)
 HPPWD Jajnehli

14 **BILL OF QUANTITY**

Name of Work :- SDF/2025/105 R/O Restoration and Rain damages on Ruhmani to Baryogi via Mahruti road in km 0/00 to 4/500. (SH:- Removal of slips in between km 0/000 to 1/500).

Estimate Cost: Rs 89,921.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in billy area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of shops and disposal of cut material with in any lift and lead upto 1000 m as per technical specification 302.3.5 and 1611 including carriage of material and other incidentals in all leads and lifts and as per direction of Engineer in charge.	761.40	per Cubic metre	118.10	89,921.00	Rupees Eighty Nine Thousand Nine Hundred Twenty One Only
			Total		89,921.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Serai Division (B&R)
 HPPWD Jodhpur

BILL OF QUANTITY

Estimate Cost: Rs

99,363.00 Only


Earnest Money:

2,000.00 Only

Time :- Two Months

Name of Work :- RR Damages Chhatr Magrugalla via Lassi road in km 0/00 to 8/825. (St:- Removal of slips in km 2/800 to 2/845 and 3/00 to 3/060).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1.5 m and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	841.35	per Cubic metre	118.10	99,363.00	Rupees Ninety Nine Thousand Three Hundred Sixty Three Only
	Total				99,363.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (B&R)
 HPPWD Jammu

15 BILL OF QUANTITY

Estimate Cost: Rs 99,169.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

Name of Work :- RR Damaged on Handel to Nilrikhad road in km 0/00 to 7/465. (SH:- Removal of slips in between km 4/000 to 7/465).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1.5 m and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	839.70	per Cubic metre	118.10	99,169.00	Rupees Ninety Nine Thousand One Hundred Sixty Nine Only
			Total		99,169.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (B&R)
 HPPWD Jambhik


BILL OF QUANTITY

Estimate Cost: Rs 99,541.00 Only
 Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damaged on Ranabag Bihani Seri road in km 0/00 to 12/000. (SH:- Removal of slips and land slide in between km 9/300 to 12/000).

S. No.	Sub Head and item of work	Dy.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1.5 m and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	842.85	per Cubic metre	118.10	99,541.00	Rupees Ninety Nine Thousand Five Hundred Forty One Only
			Total		99,541.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Serial Division (B&R)
 HPPWD Jajichah

BILL OF QUANTITY

Estimate Cost: Rs 99,487.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damaged on Chhatari Gadagusain road in km 0/00 to 29/000. (SH:- Removal of slips in between km 13/00 to 20/00).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1.5 m and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	842.40	per Cubic metre	118.10	99,487.00	Rupees Ninety Nine Thousand Four Hundred Eighty Seven Only
			Total		99,487.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Seral Division (B&R)
HPPWD Janjale

BILL OF QUANTITY

Estimate Cost: Rs 99,009.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

Name of Work :- RR Damaged on Tapnali Khauli road in km 0/00 to 15/000. (SH:- Removal of slips in between km 5/000 to 8/000).

S. No.	Sub Head and item of work	Dy.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in lift upto 1.5 m and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	838.35	per Cubic metre	118.10	99,009.00	Rupees Ninety Nine Thousand Nine Only
			Total		99,009.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Serai Division (B&R)
 HPPWD Jangladesh


BILL OF QUANTITY

Estimate Cost: Rs 99,700.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damaged on Tapnali Ghat road in km 0/00 to 18/000. (SH:- Removal of slips in between km 13/000 to 18/000).

S. No.	Sub Head and Item of work	Eqt.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1.5 m and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge Including carriage of material within all leads lifts and other incidental charges.	844.20	per Cubic metre	118.10	99,700.00	Rupees Ninety Nine Thousand Seven Hundred Only
			Total		99,700.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (B&R)
 HPFW D. K. J.

BILL OF QUANTITY

Name of Work :- RR Damaged on Mehach Deori road in km 0/00 to 7/000. (SH:- Removal of slips in between km 4/000 to 7/000).

Estimate Cost: Rs 99,523.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1500 ^{any height} and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	842.70	per Cubic metre	118.10	99,523.00	Rupees Ninety Nine Thousand Five Hundred Twenty Three Only
			Total		99,523.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seral Division (B&R)
 HPPW-Banjaran

BILL OF QUANTITY

Estimate Cost: Rs 99,842.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damaged on Nagan Chhatri road in km 13/000 to 22/000. (SH:- Removal of slips in between km 13/000 to 18/000).

S. No.	Sub Head and item of work	Dy.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 1000 ^{any height} and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	845.40	per Cubic metre	118.10	99,842.00	Nine Thousand Eight Hundred Forty Two Only
			Total		99,842.00	
	Quated Rate in Figure					
	Quated Rate in Word					



Executive Engineer
Sera/ Division (B&R)
HPPWD/anijethill

BILL OF QUANTITY

Estimate Cost: Rs 99,665.00 Only
Earnest Money: 2,000.00 Only
Time :- Two Months

Name of Work :- RR Damaged on Gadadgusain Thanwarigad Lababan road in km 0/000 to 7/000. (SH:- Removal of slips in between km 0/000 to 4/000).

S. No.	Sub Head and item of work	Dy.	Unit	Estimated Rate (in Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in lift upto 1000 ^{any height} and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	843.90	per Cubic metre	118.10	99,665.00	Rupees Ninety Nine Thousand Six Hundred Sixty Five Only
			Total		99,665.00	
	Quoted Rate in Figure					
	Quoted Rate in Word					


 Executive Engineer
 Seral Division (B&R)
 HPPWD Jarehli

BILL OF QUANTITY

Estimate Cost: Rs 99,399.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work :- RR Damaged on Thanwarigad via Dugha Pokhar road in km 0/000 to 6/500. (SH:- Removal of slips in km 0/000 to 4/000).

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto ^{299 m depth} 1000 land lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	841.65	per Cubic metre	118.10	99,399.00	Rupees Ninety Nine Thousand Three Hundred Ninety Nine Only
			Total		99,399.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Serial Division (B&R)
HPPWD, Jaipur


25

BILL OF QUANTITY

Estimate Cost: Rs 98,991.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

Name of Work :- RR Damaged on Baryogi Thanser Magrugalla road in km 0/000 to 8/510. (SH:- Removal of slips and land slide in km 2/400 to 2/520).

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto 300m ^{any height} and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges .	838.20	per Cubic metre	118.10	98,991.00	Rupees Ninety Eight Thousand Nine Hundred Ninety One Only
			Total		98,991.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Serai Division (B&R)
 HPPWD Bareilly

BILL OF QUANTITY

Estimate Cost: Rs

Earnest Money:

Time :- Two Months

99,806.00 Only
2,000.00 Only

Name of Work :- RR Damaged on Jognidhar Bahlidhar road in km 0/000 to 4/000. (SH:- Removal of slips in km 0/000 to 4/000).

S. No.	Sub Head and item of work	Qty	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in lift upto 1000 ^{any height} and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- In-Charge including carriage of material within all leads lifts and other incidental charges.	845.10	per Cubic metre	118.10	99,806.00	Rupees Ninety Nine Thousand Eight Hundred Six Only
			Total		99,806.00	
	Quated Rate in Figure					
	Quated Rate in Word					


Executive Engineer
Serial Division (B&R)
HPPWD Jajmal

BILL OF QUANTITY

Estimate Cost: Rs

99,399.00 Only

Earnest Money:

2,000.00 Only

Time :- Two Months

Name of Work :- RR Damaged on Bethwan Badach road in km 0/000 to 4/000. (SH:- Removal of slips in km 0/000 to 4/000).

S. No.	Sub Head and item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto ^{avg height} 1000 and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	841.65	per Cubic metre	118.10	99,399.00	Rupees Ninety Nine Thousand Three Hundred Ninety Nine Only
			Total		99,399.00	
	Quoted Rate in Figure					
	Quoted Rate in Word					


 Executive Engineer
 Serai Division (B&R)
 HPPWD Janielli


28

BILL OF QUANTITY

Estimate Cost: Rs 99,027.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

Name of Work :- RR Damaged on Baryogi Kakradhar road in km 0/000 to 4/000. (SH:- Removal of slips in km 0/000 to 4/000).

S. No.	Sub Head and Item of work	Qty.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slopes and disposal of cut material with in lift upto ^{9m height} 15m and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	838.50	per Cubic metre	118.10	99,027.00	Rupees Niney Nine Thousand Twenty Seven Only
			Total		99,027.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seral Division (B&R)
 HPPWD Janjichill


20

BILL OF QUANTITY

Estimate Cost: Rs 99,859.00 Only
 Earnest Money: 2,000.00 Only
 Time :- Two Months

Name of Work :- RR Damaged on Dhishani Panchayat Ghar kandhi Paul Shilh road in km 0/000 to 4/000. (SH:- Removal of slips in between km 0/000 to 4/000).

S. No.	Sub Head and item of work	Dyt.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. P	Total Amount with all Taxes including GST in Word
1	Removal of land slide in hilly area in ordinary rock not requiring blasting by mechanical means including cutting and trimming of slops and disposal of cut material with in lift upto ^{any height.} 1000 and lead upto 1000 m as per technical specification 302.3.5 and 1611 and direction of Engineer- in-Charge including carriage of material within all leads lifts and other incidental charges.	845.55	per Cubic metre	118.10	99,859.00	Rupees Ninety Nine Thousand Eight Hundred Fifty Nine Only
			Total		99,859.00	
	Quated Rate in Figure					
	Quated Rate in Word					


 Executive Engineer
 Seraj Division (B&R)
 HPPWD Jan 2024

BILL OF QUANTITY

Estimate Cost: Rs 99,635.00 Only
Earnest Money: 2,000.00 Only

Time :- Two Months

Name of Work:- OSP/2023/929 Construction of Tractor road with Retaining wall at Village Nalauti near the house of Smt. Champa Kumari (SH :- Construction of Dry rubble stone Retaining wall at RD 0/120 to 0/127.20).

S. No.	Sub Head and Item of work	Dy.	Unit	Estimated Rate (In Rs)	Total Amount with all Taxes including GST in Rs. p	Total Amount with all Taxes including GST in Word
1	Earth work in excavation for structures as per drawing and technical specifications clause 305.1 including setting out construction of shoring and bracing, removal of stumps and other deleterious material of disposal any lead and dressing of sides and bottom and backfilling in trenches with excavated suitable material ordinary soil including carriage of material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	12.17	per Cubic metre	552.35	6,722.00	Rupees Six Thousand Seven Hundred Twenty Two Only
2	Providing and Laying 1:4:8 (one cement : four sand : eight graded crushed stone aggregate and reinforced concrete in in open foundations complete as per drawing and technical specification clauses 802, 803, 1202 and 1203 including carriage of material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	0.52	Per Cubic metre	5236.1	2723	Rupees Two Thousand Seven Hundred Twenty Three Only
2	Construction of dry rubble masonry for retaining walls, breast walls, revetment walls and parapets etc. for sub-structure and super structure complete as per drawing and technical specification clauses 704.6 & 1302.5 including carriage of material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	21.24	per Cubic metre	3980.50	84,546.00	Rupees Eighty Four Thousand Five Hundred Forty Six Only
3	Back filling behind abutment, wing wall and return wall complete as per drawing and technical specification clause 1204.3.8 granular material within all leads and lifts and other incidental and as per the direction of the Engineer-in-Charge.	4.32	per Cubic metre	1306.55	5,644.00	Rupees Five Thousand Six Hundred Forty Four Only
	Quoted Rate In Figure		Total		99,635.00	
	Quoted Rate In Word					